


230V | 400V | 415V

AC Earth Leakage Circuit Breaker




SCB8LE-63
 1P AC 230V

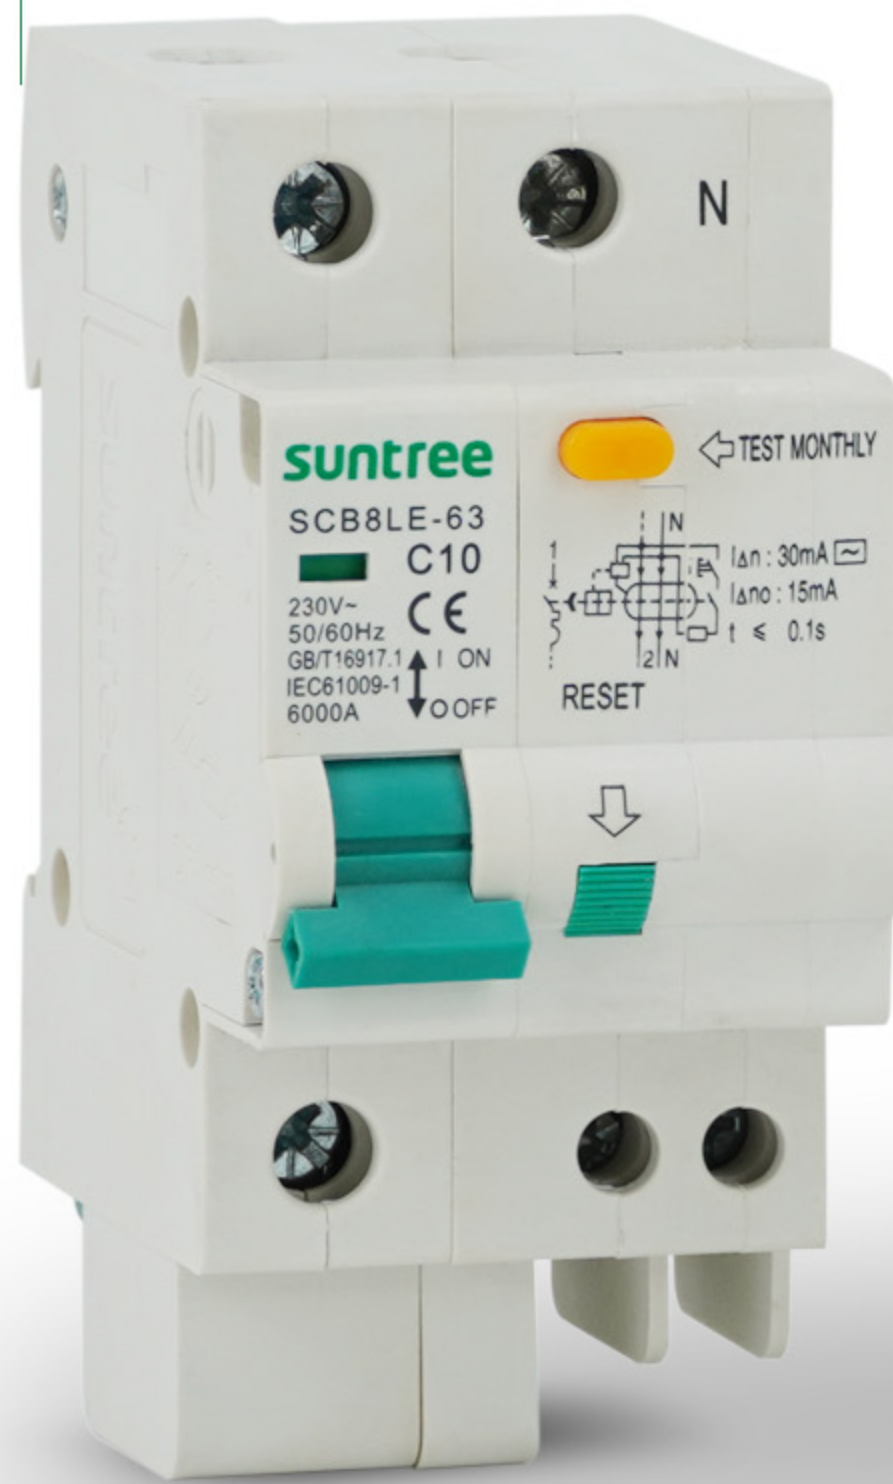

SCB8LE-63
 2P AC 230V



SCB8LE-63
 3P AC 400V

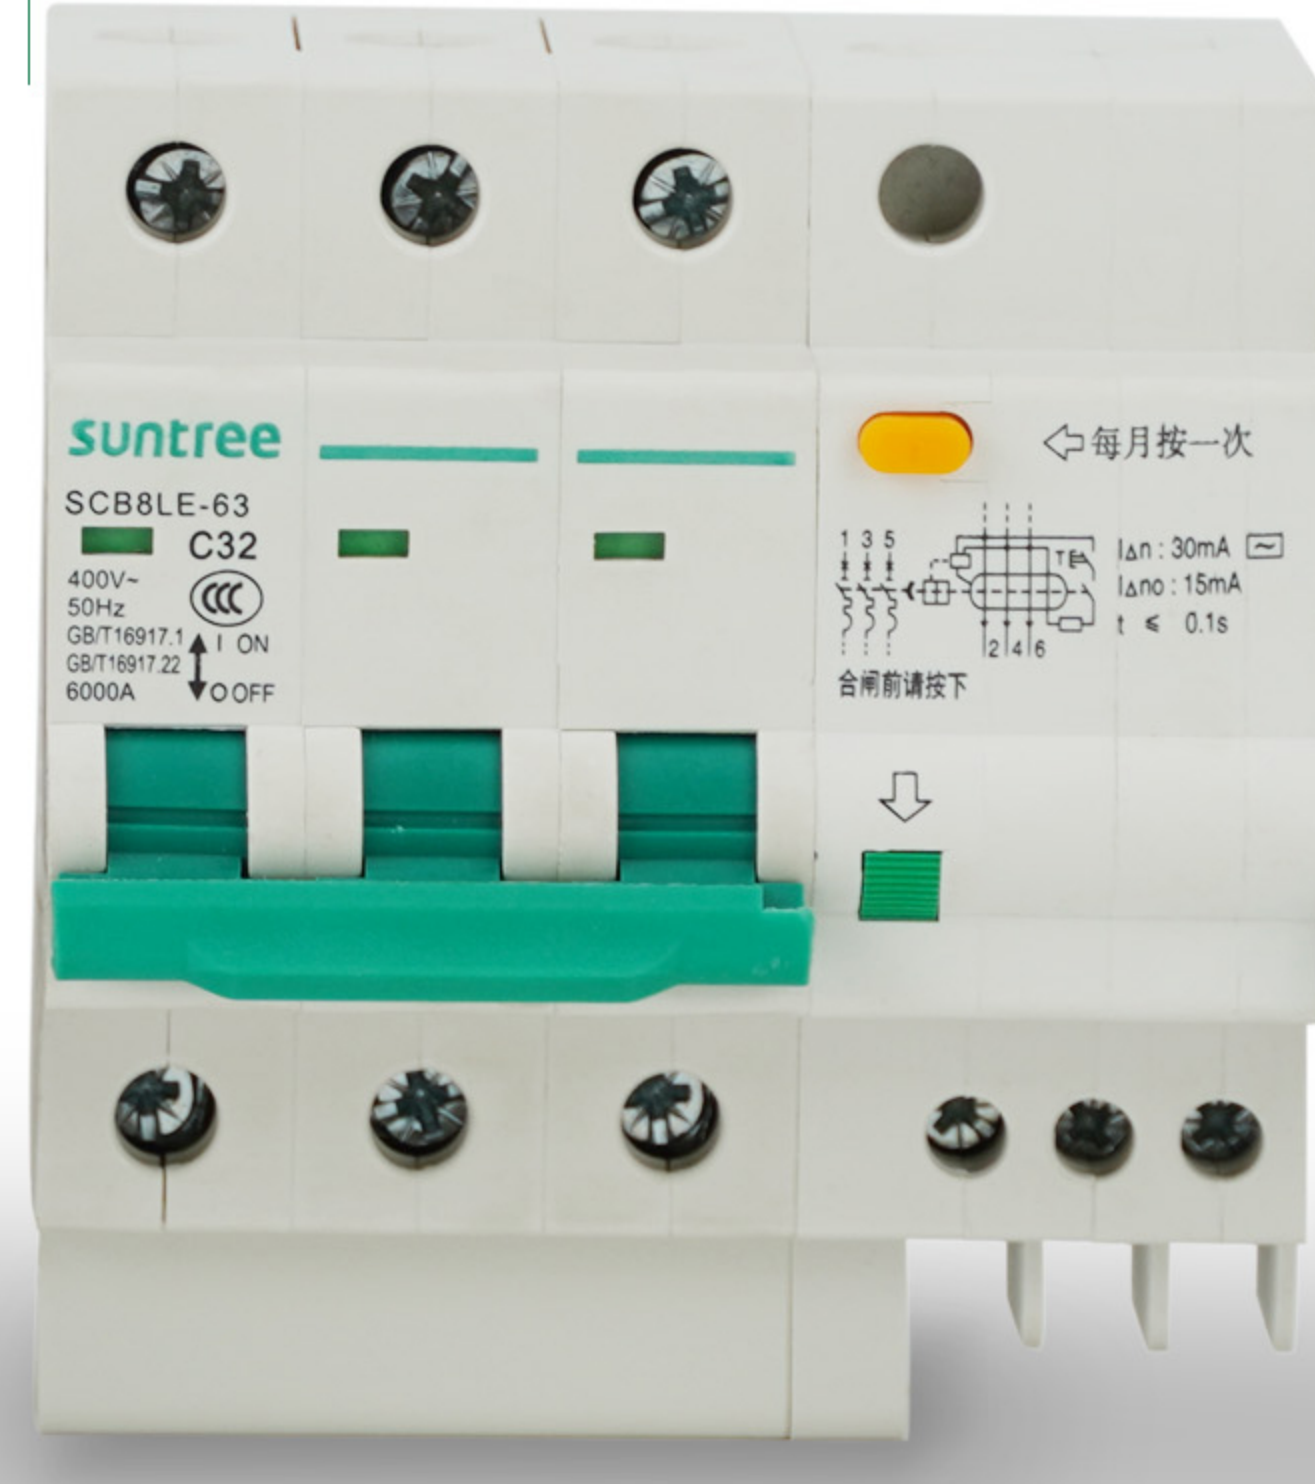

SCB8LE-63
 4P AC 400V



You can choose the current:

6A , 10A , 16A


20A , 25A , 32A

40A , 50A , 63A



6KA


Small size, High breaking capacity


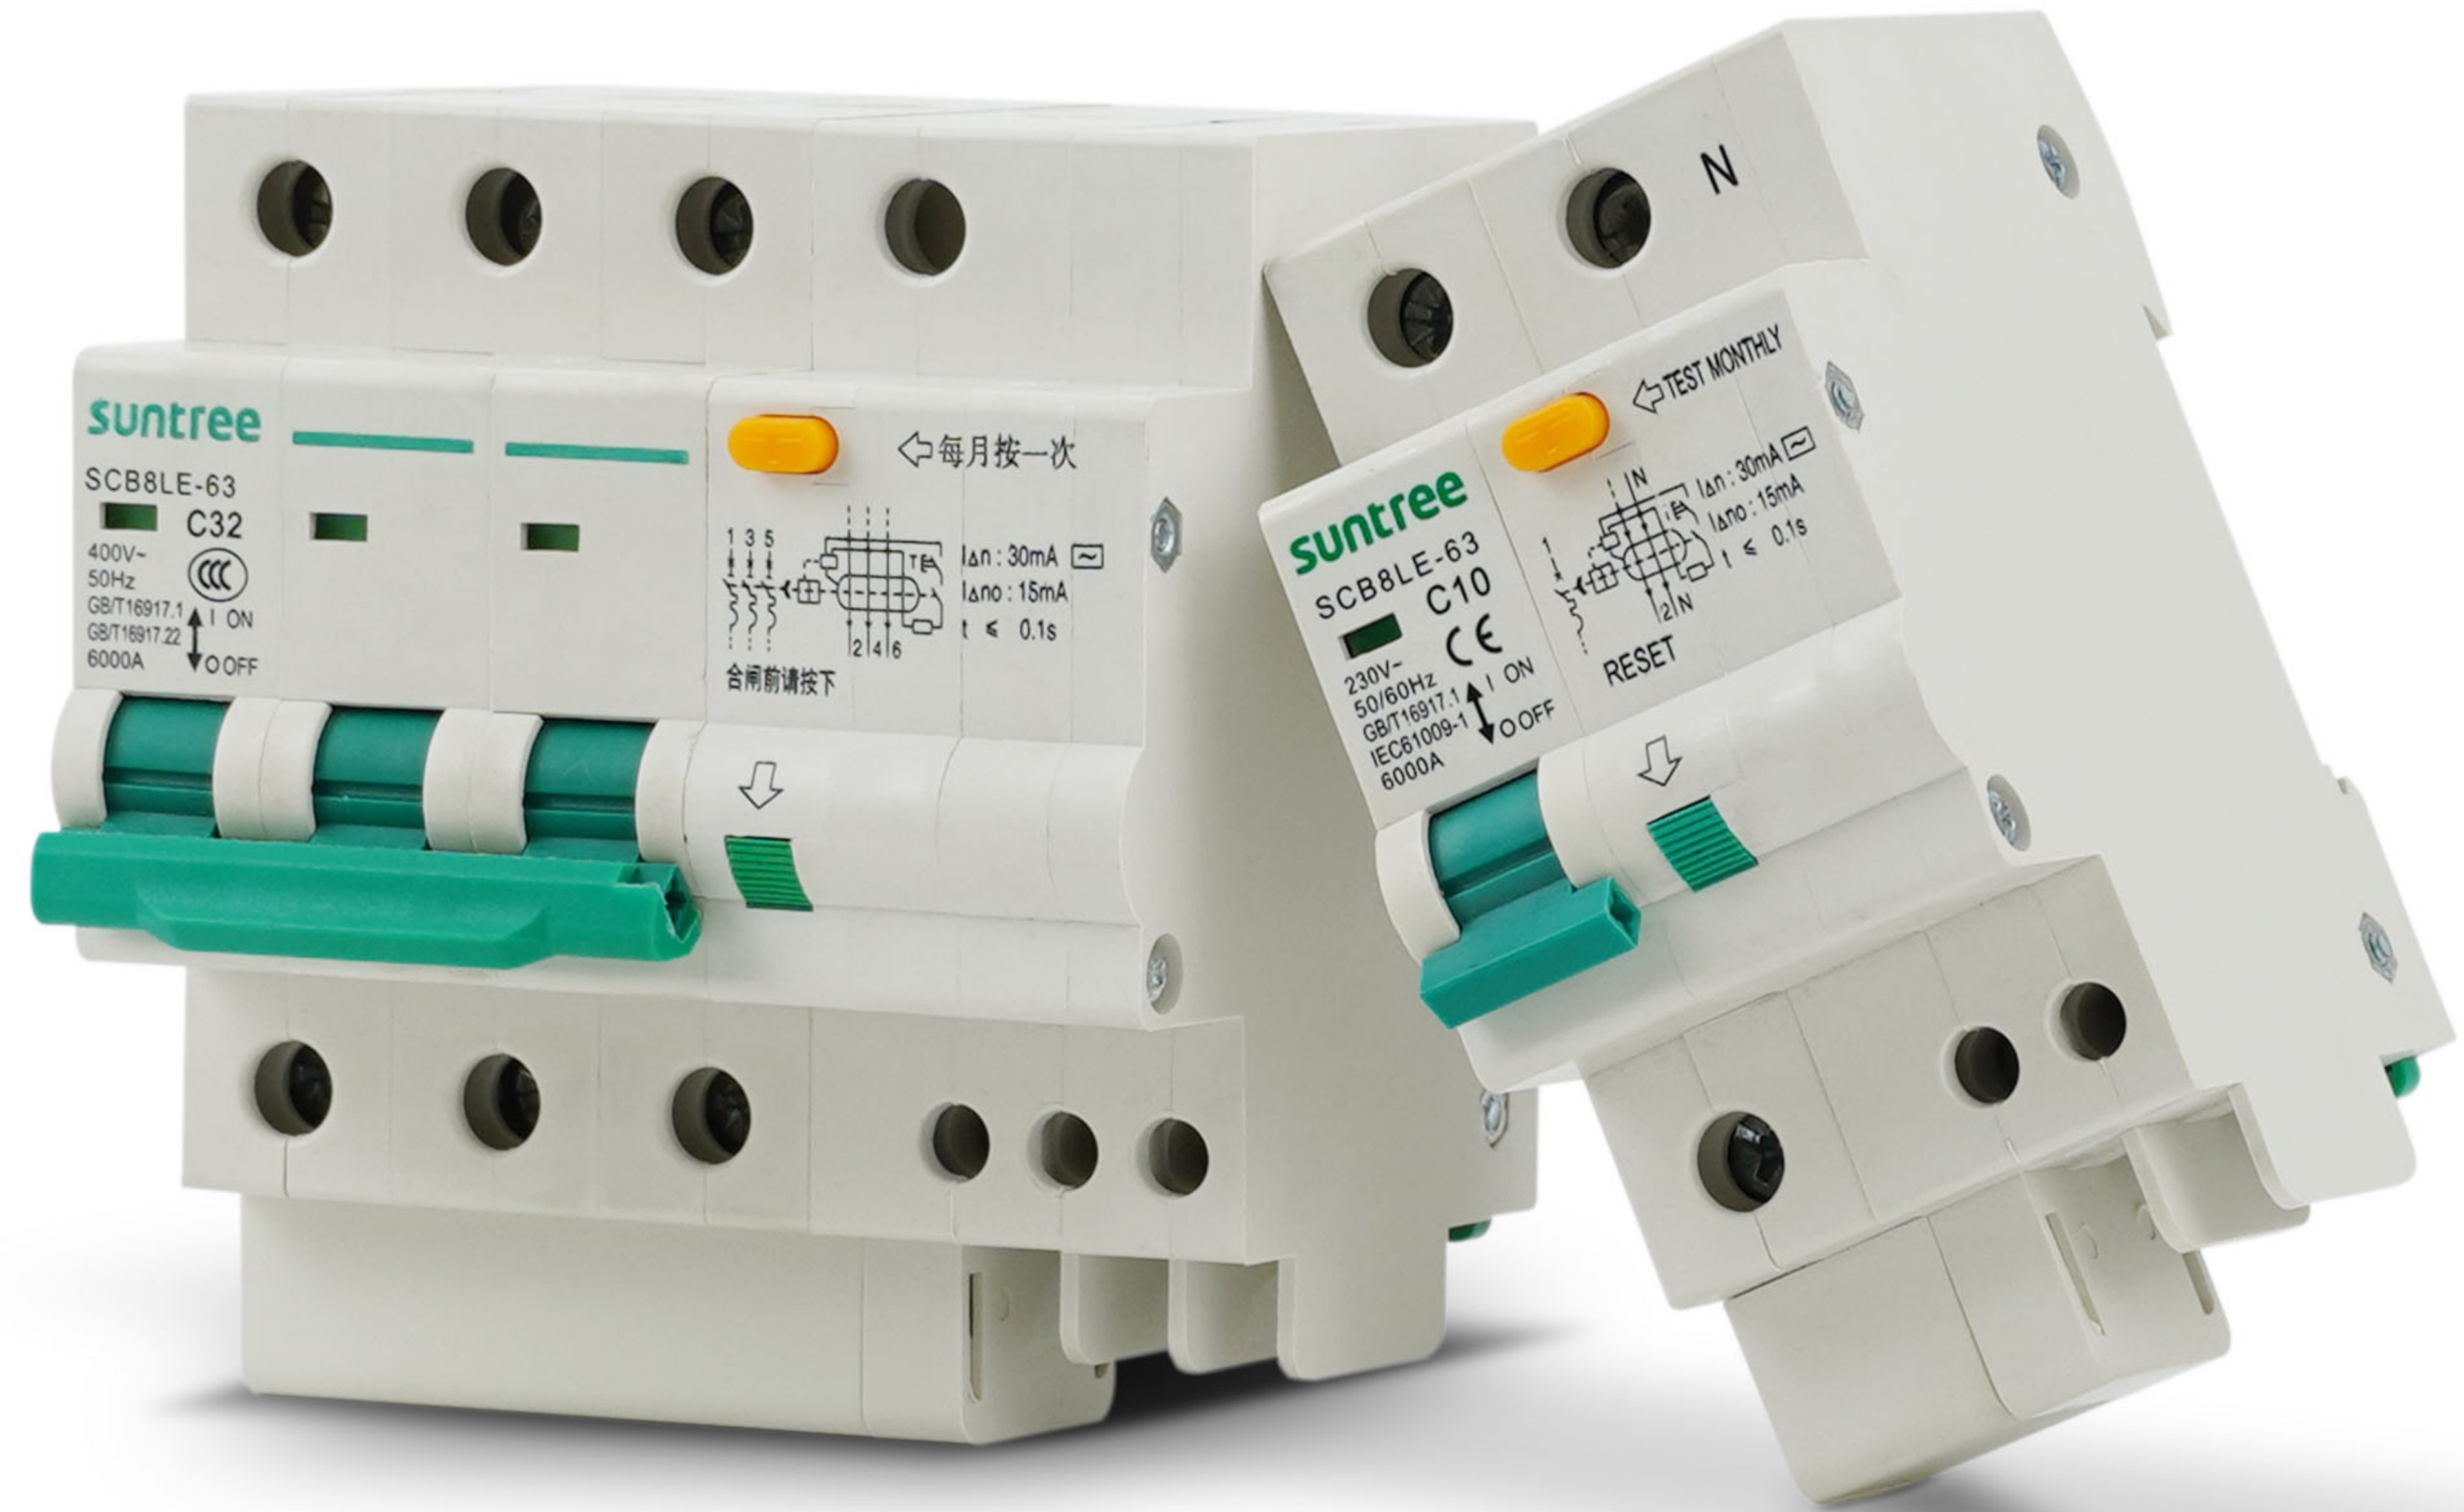





960°C flame retardant test

The flame can be extinguished by itself within 30 seconds after high-temperature combustion, no molten liquid drip from the product, and the cotton wool 30 cm below the product will not be ignited. It belongs to the **Vo** fire protection class.

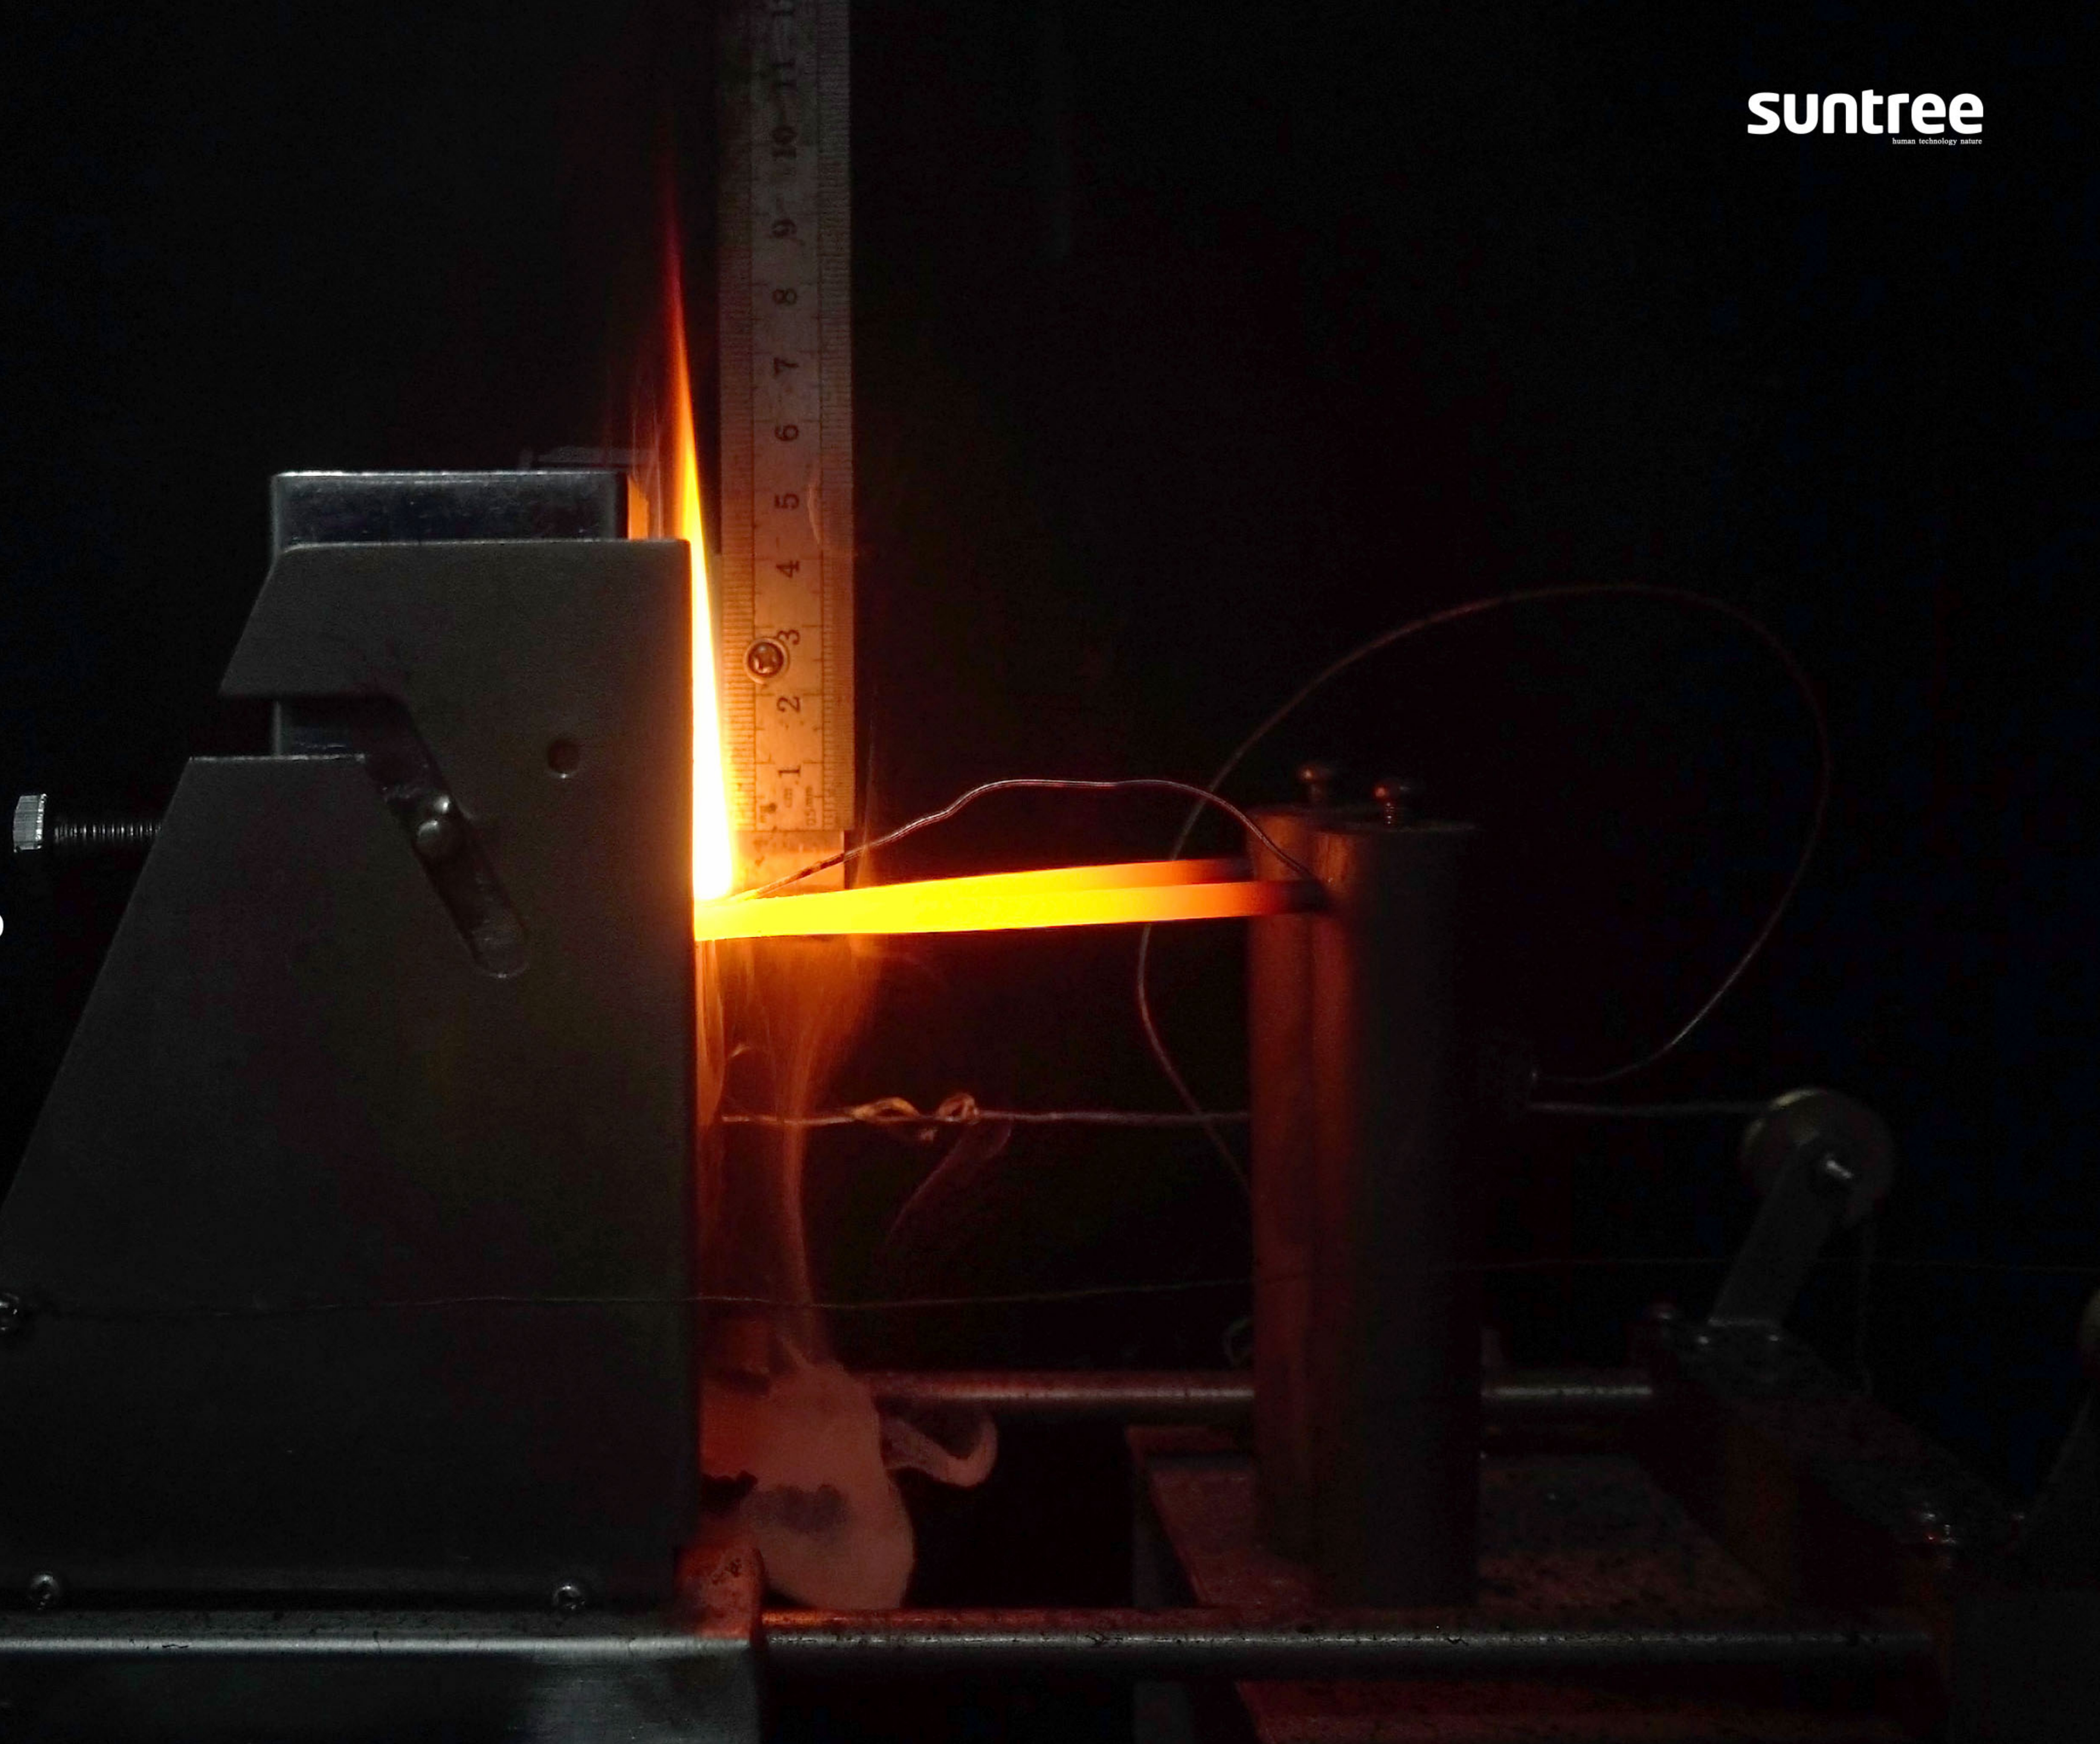


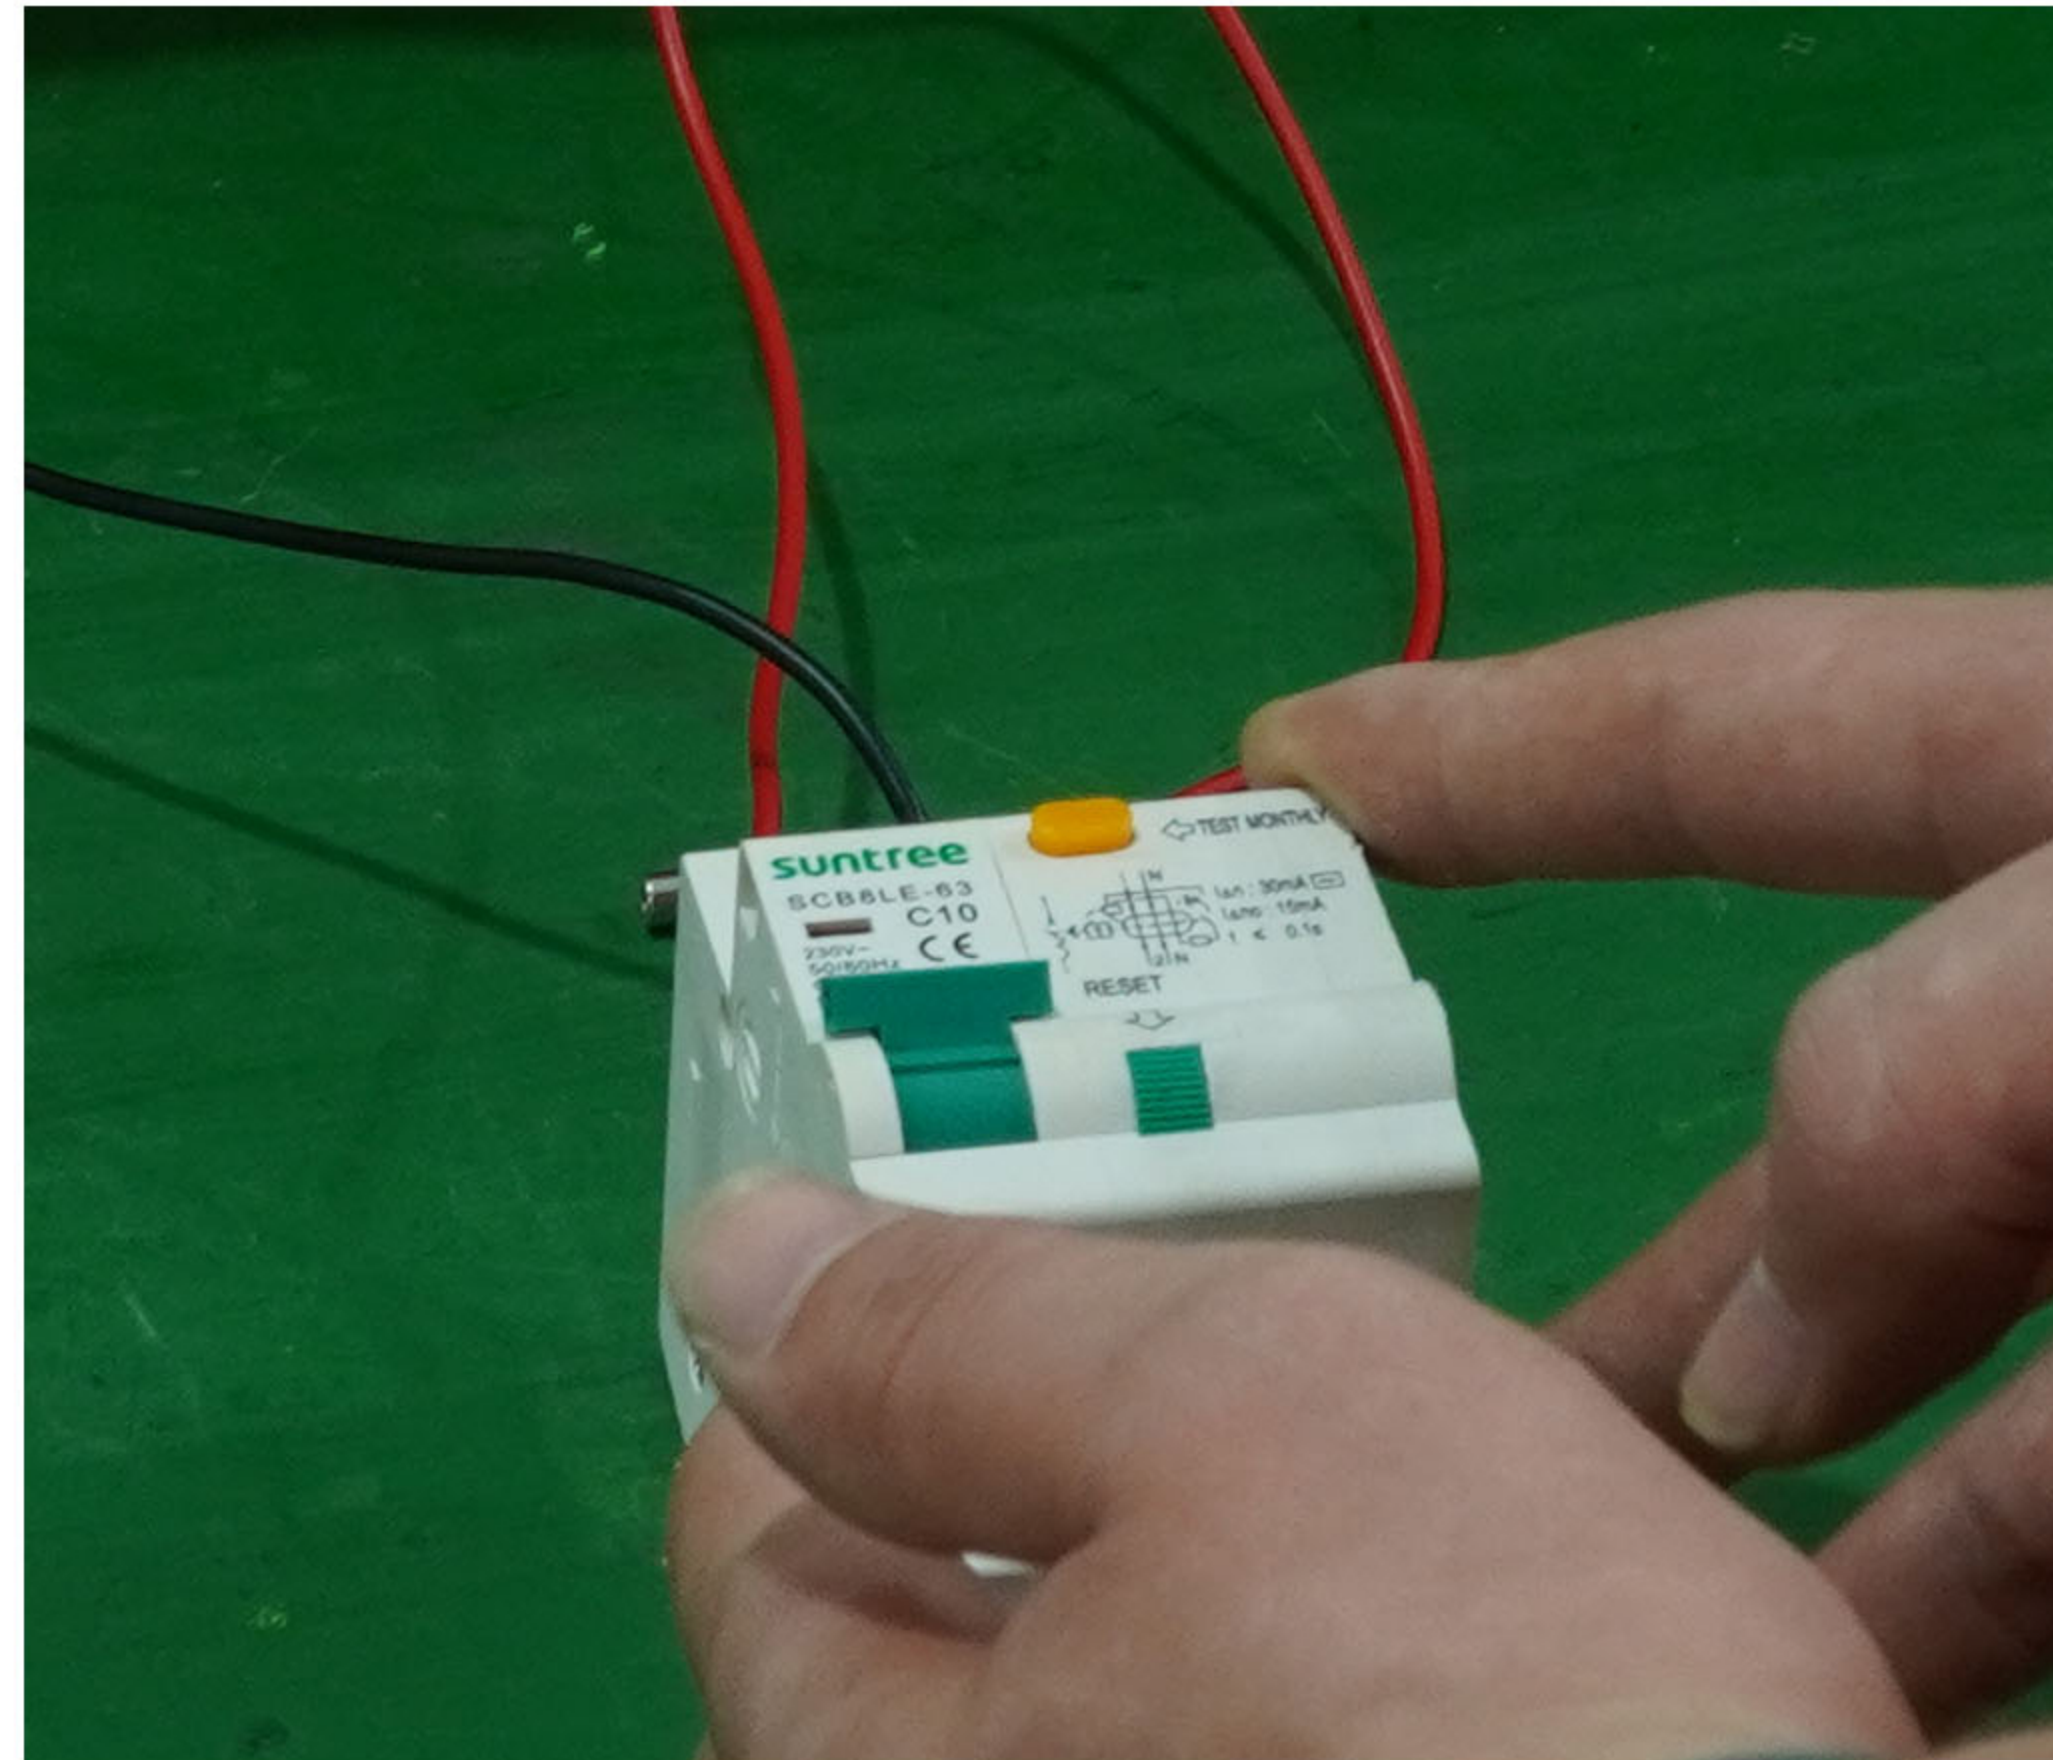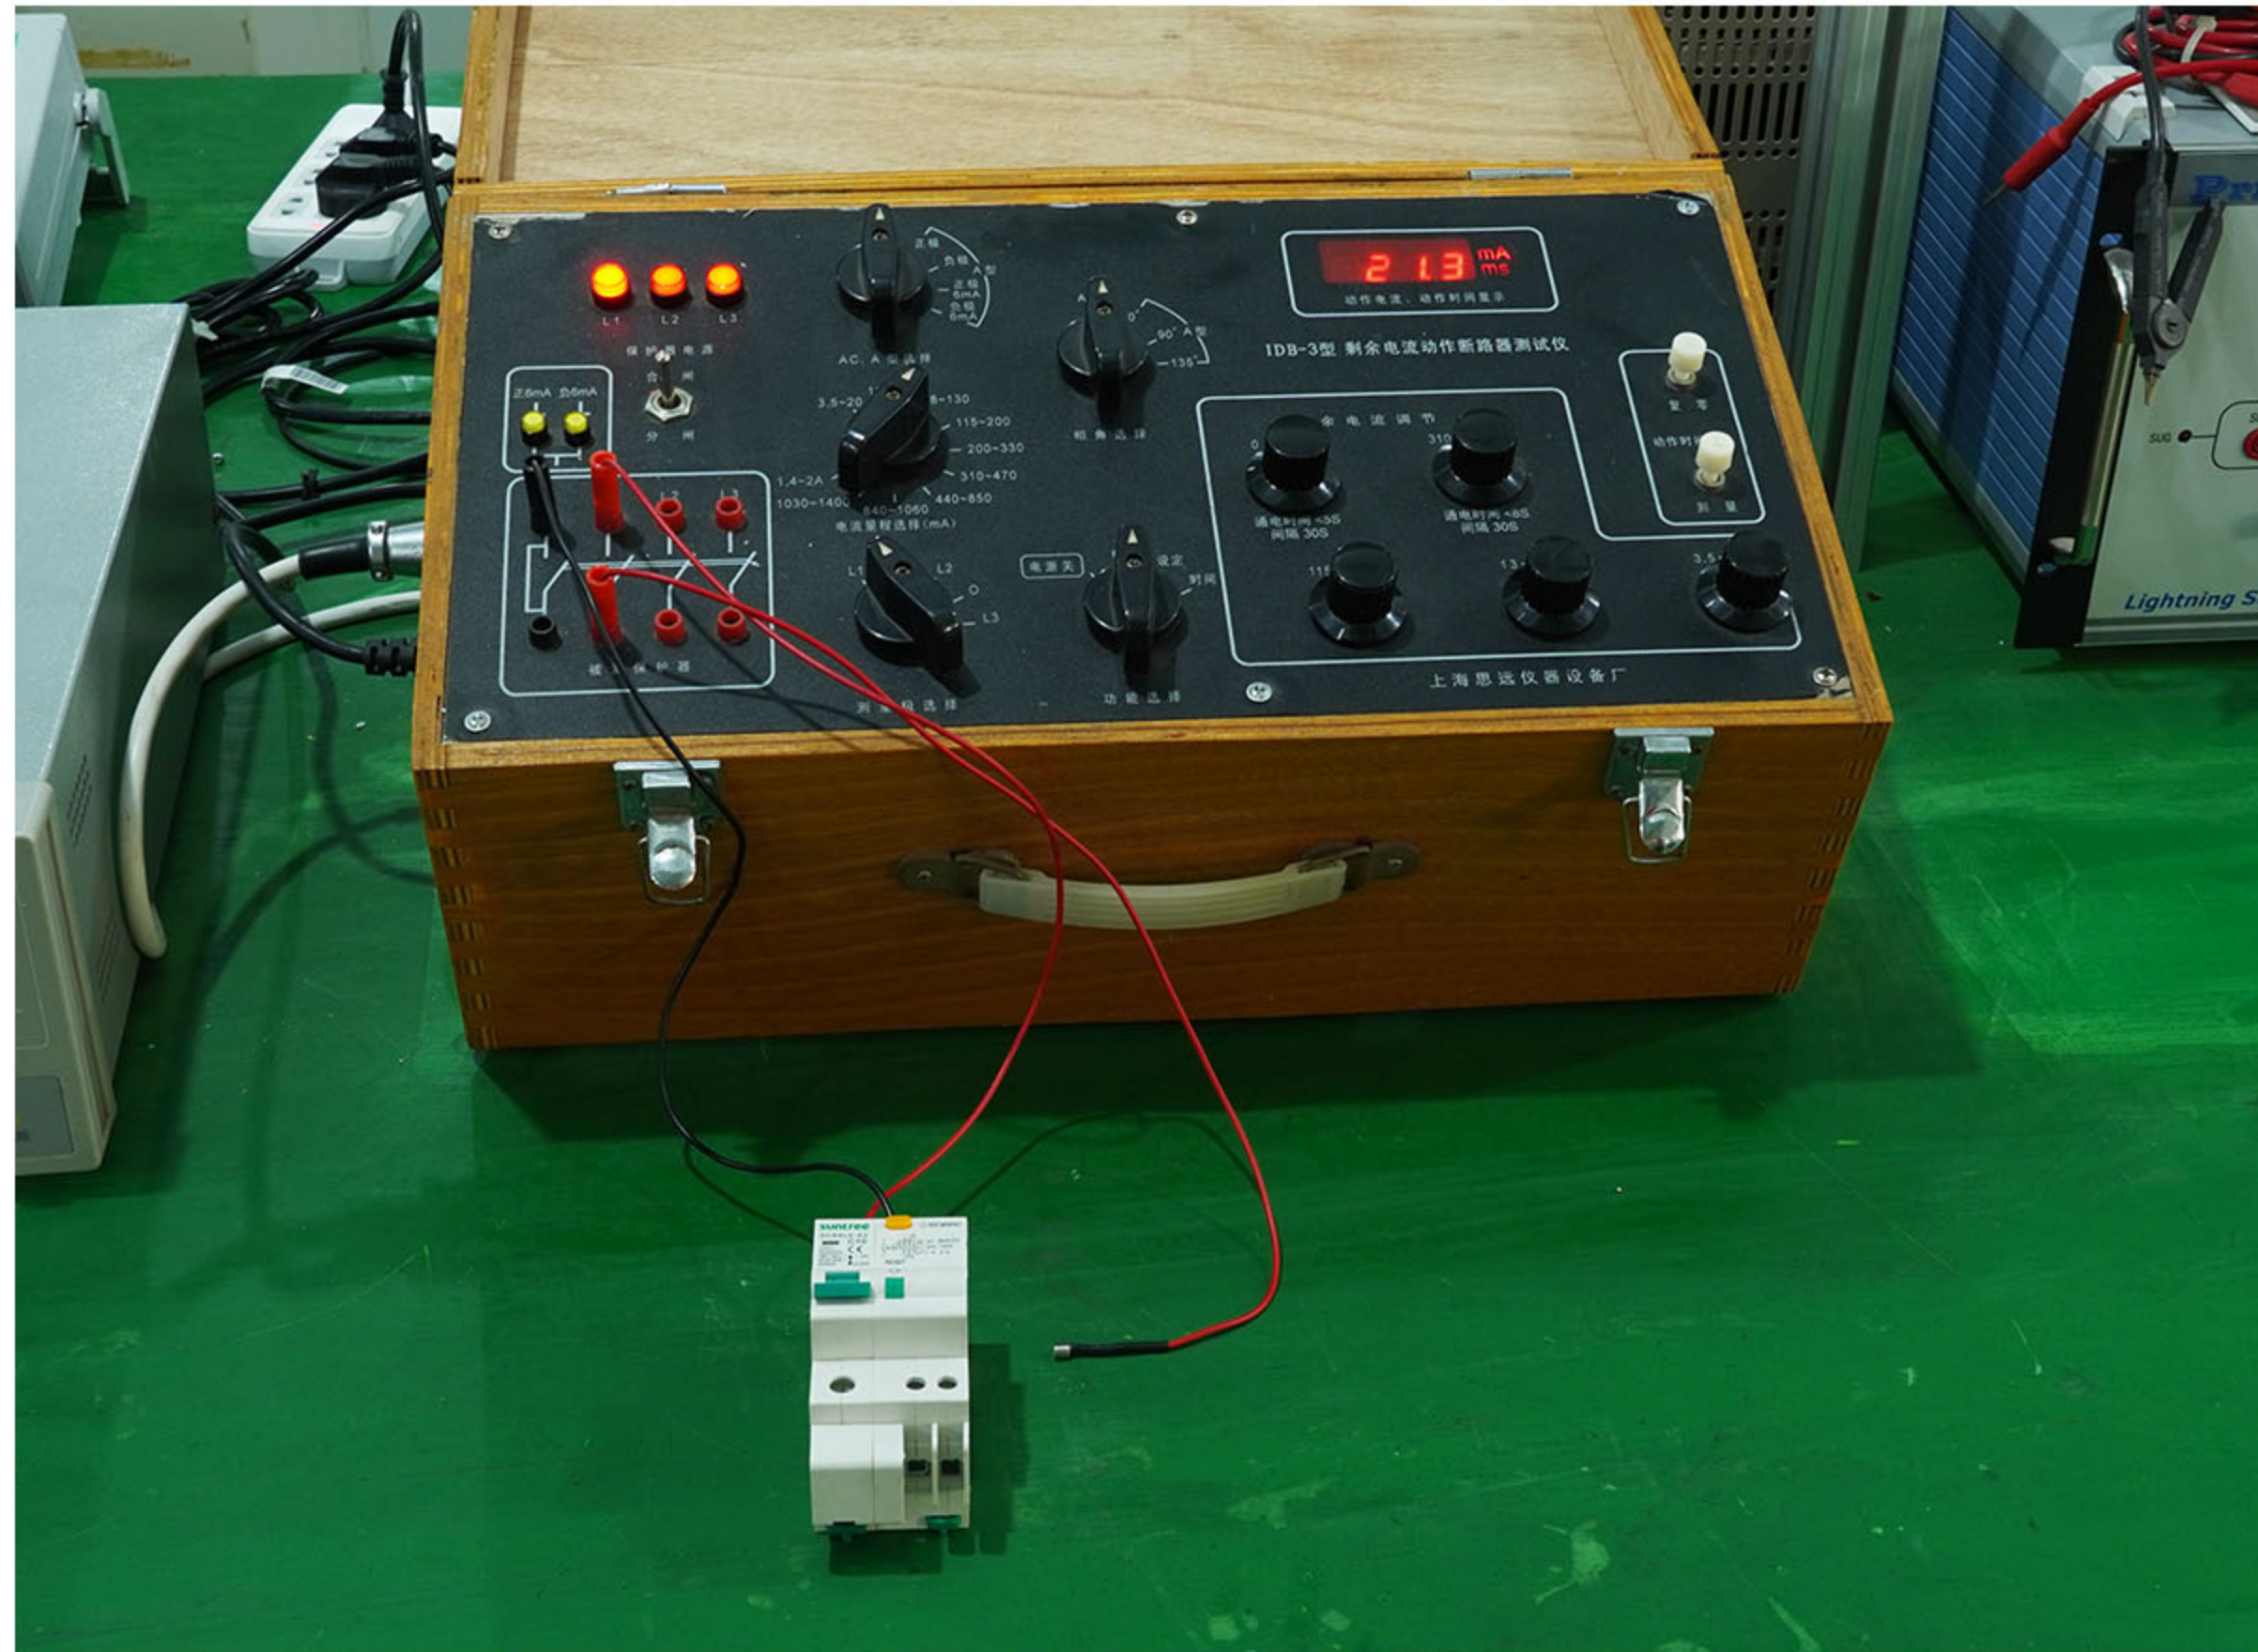

20mA-25mA to prevent electric shock protection from misoperation, more than 30mA must be disconnected within 0.1 second to ensure safety

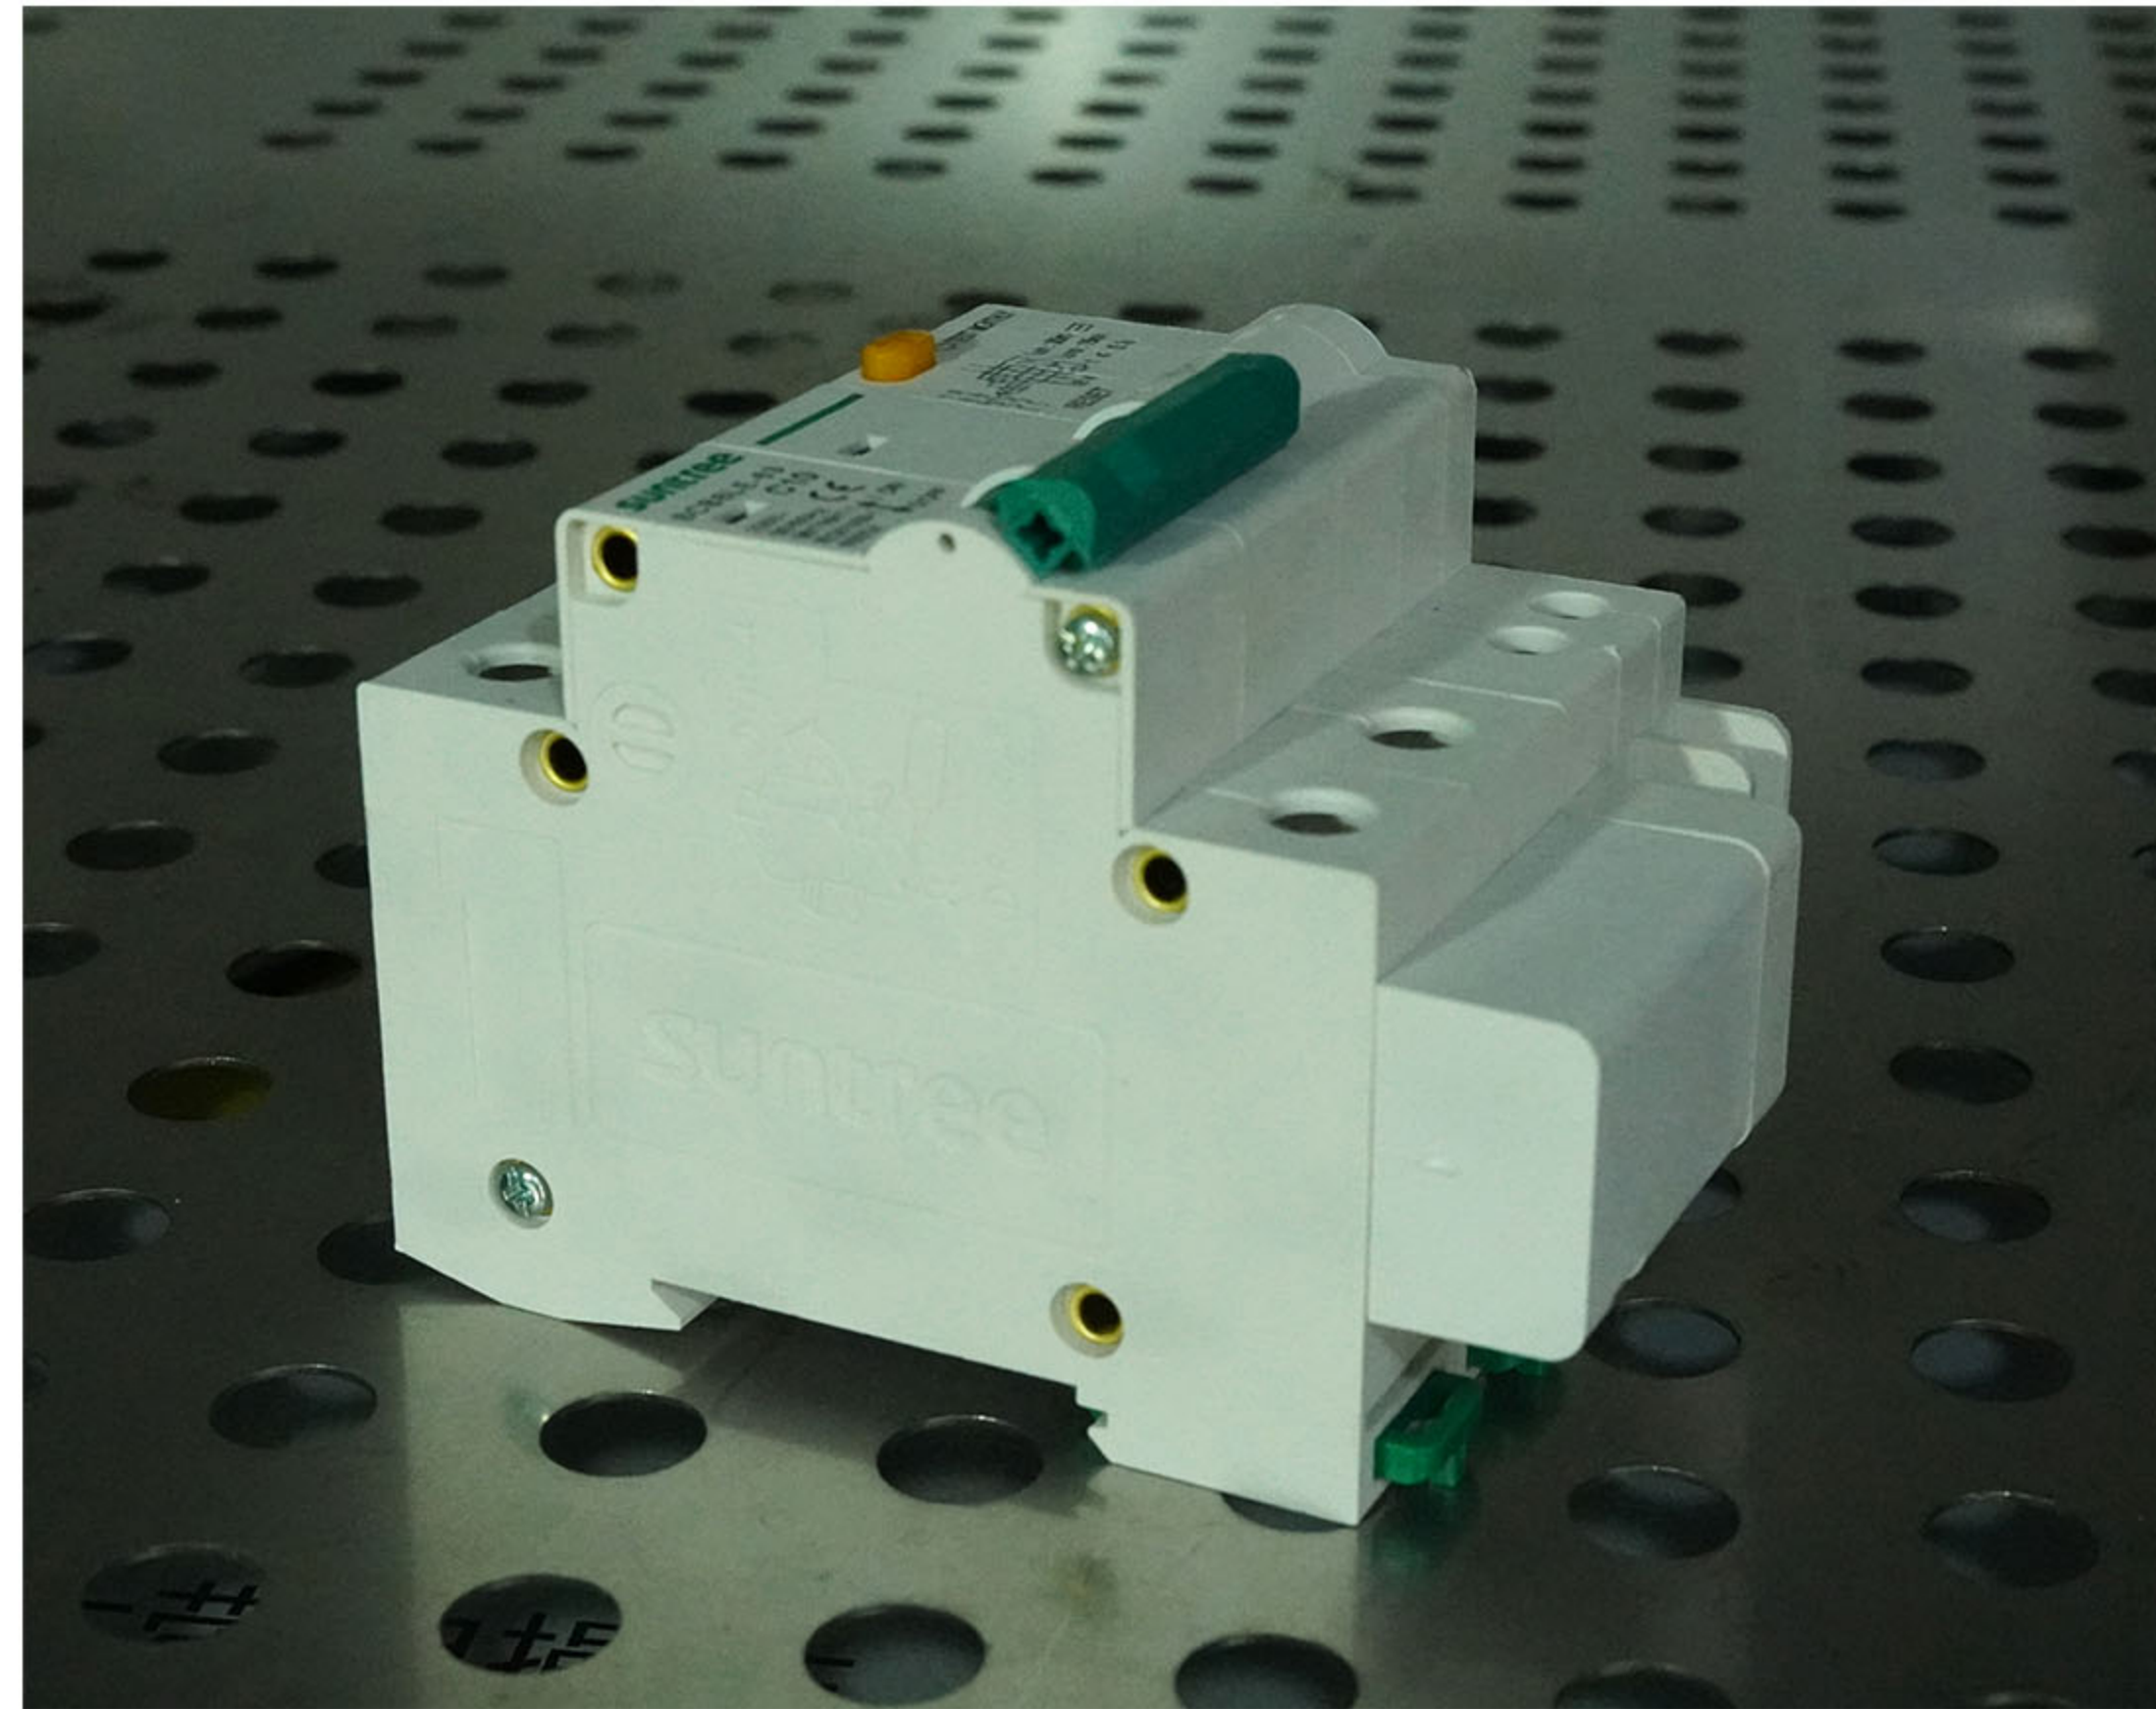


Place the product in the test box for 48 hours, set a high temperature of 70°C , a humidity of 90% , and a low temperature of -25°C to simulate whether the extreme environment affects the product.

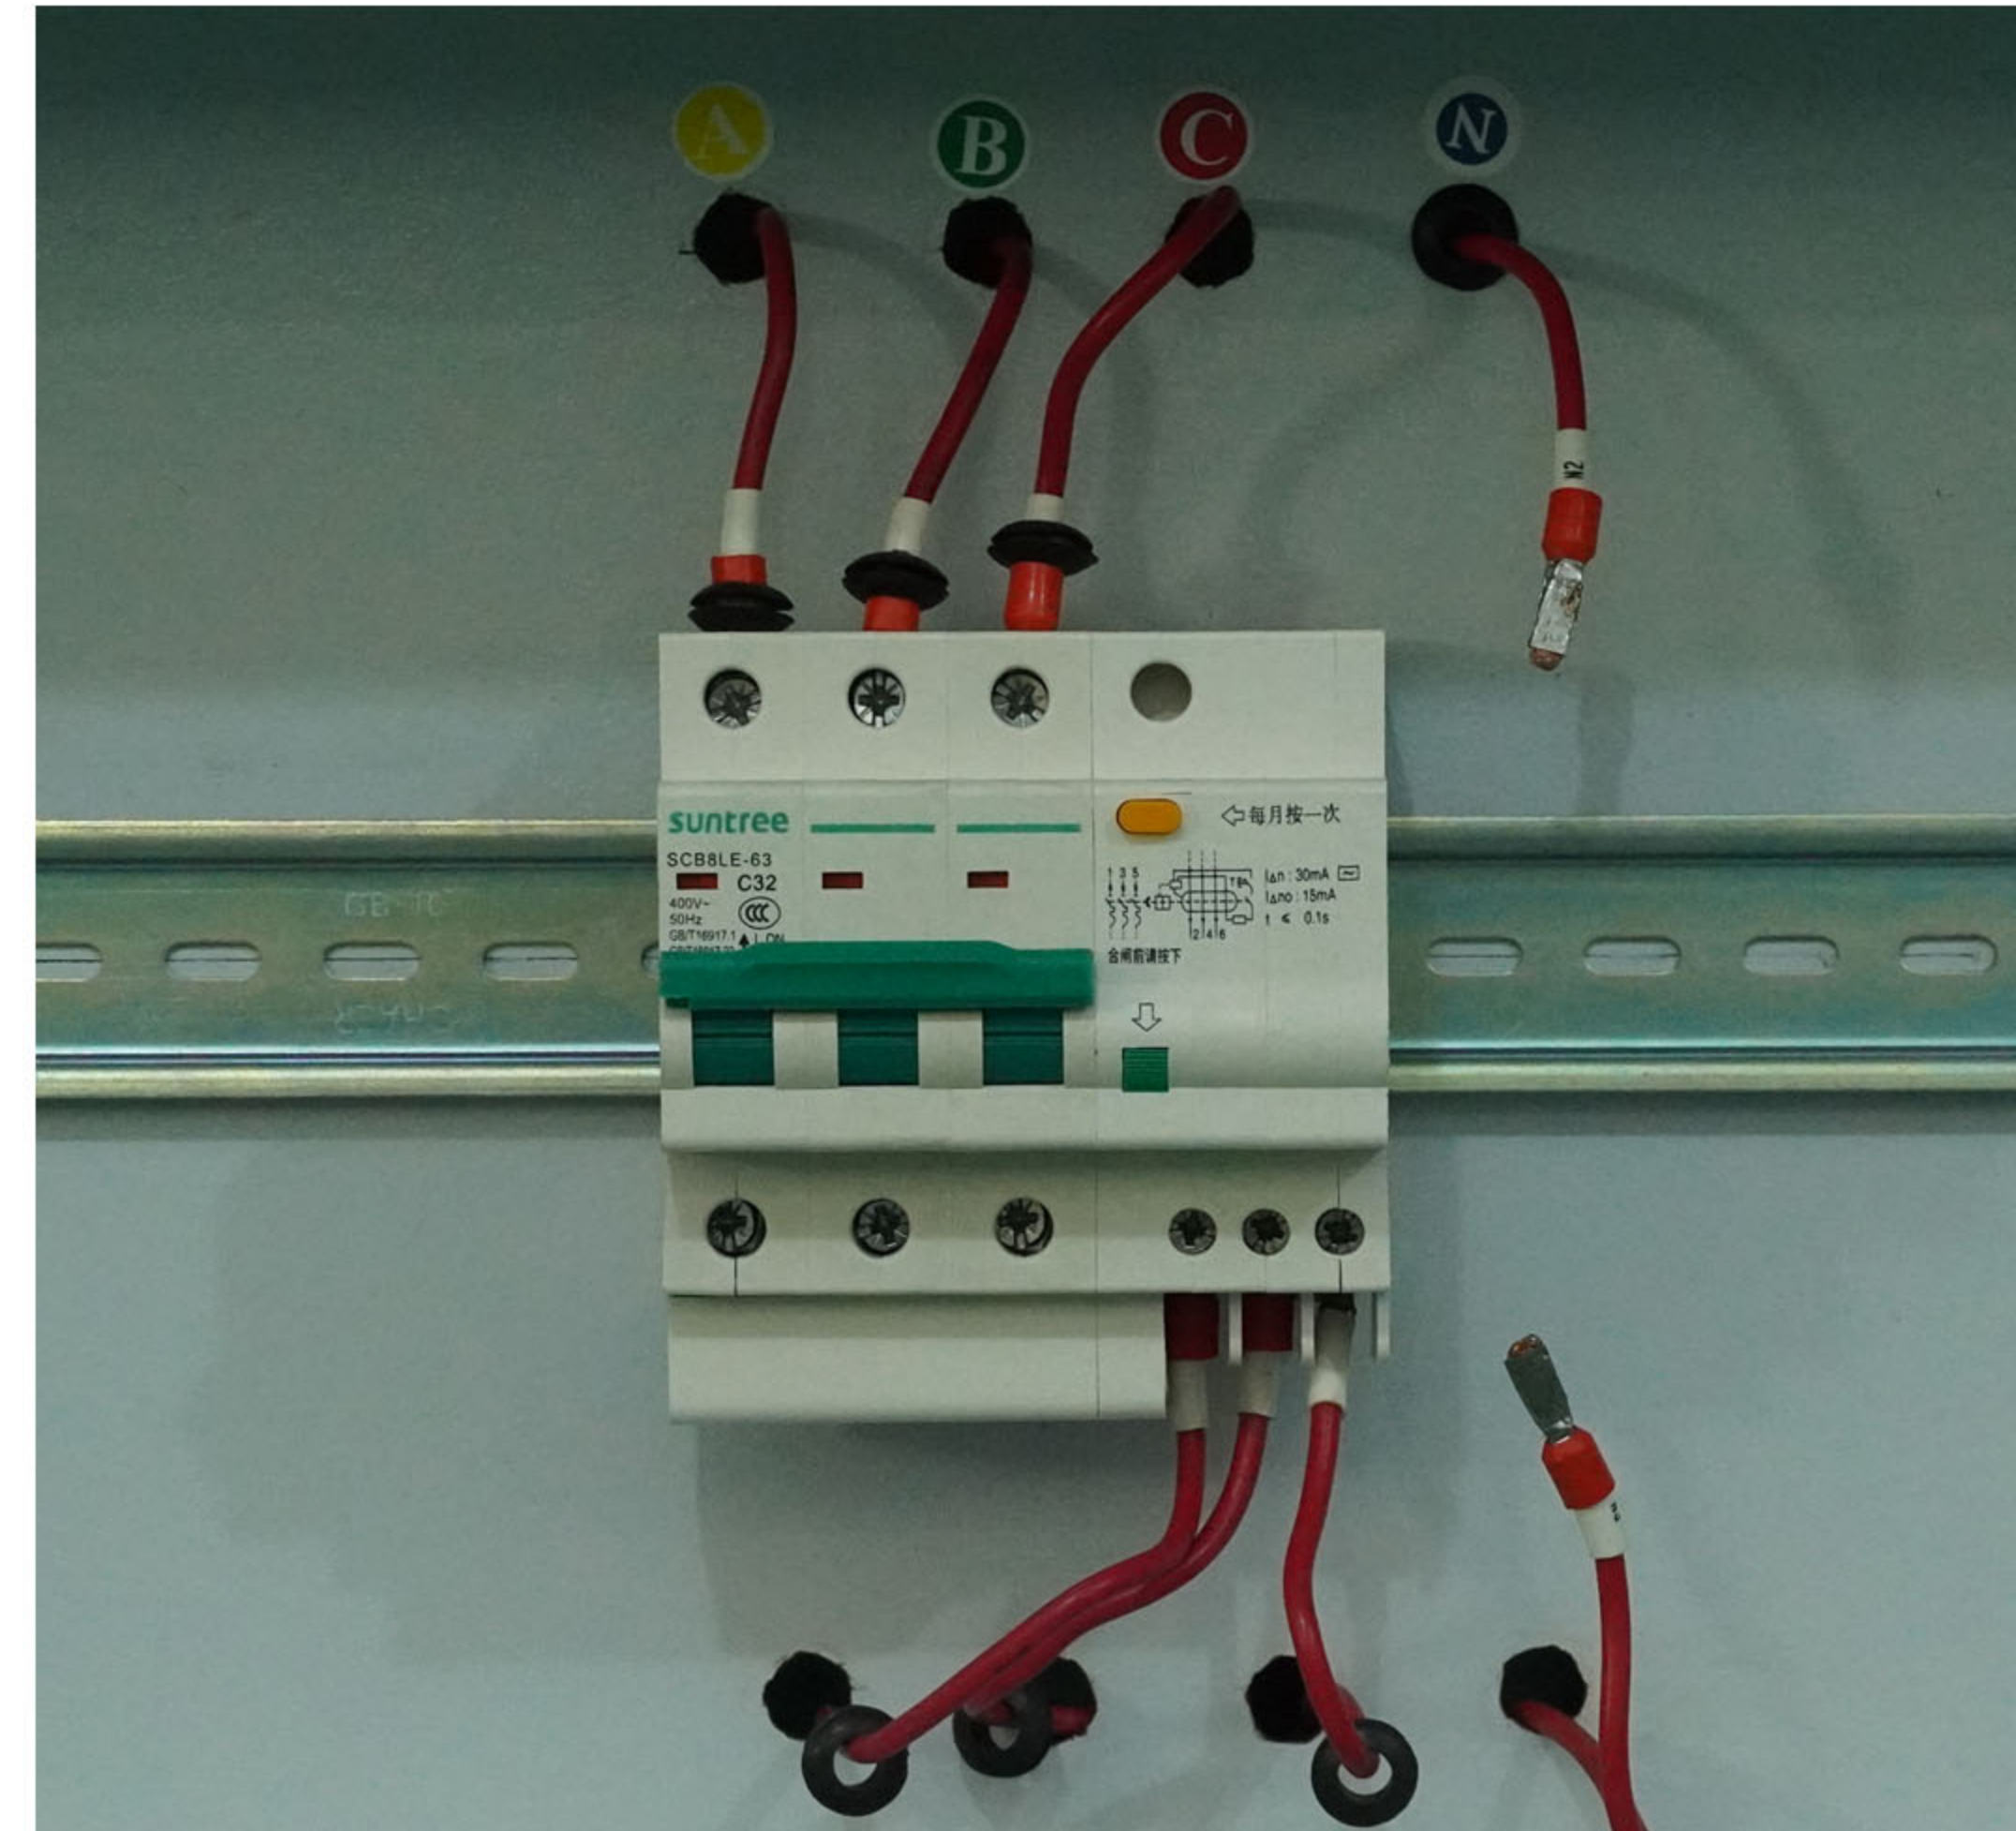


The analog product encounters interference from other electric waves, magnetic fields, etc. during use



Test the anti-interference ability of the components and test whether the components are stable

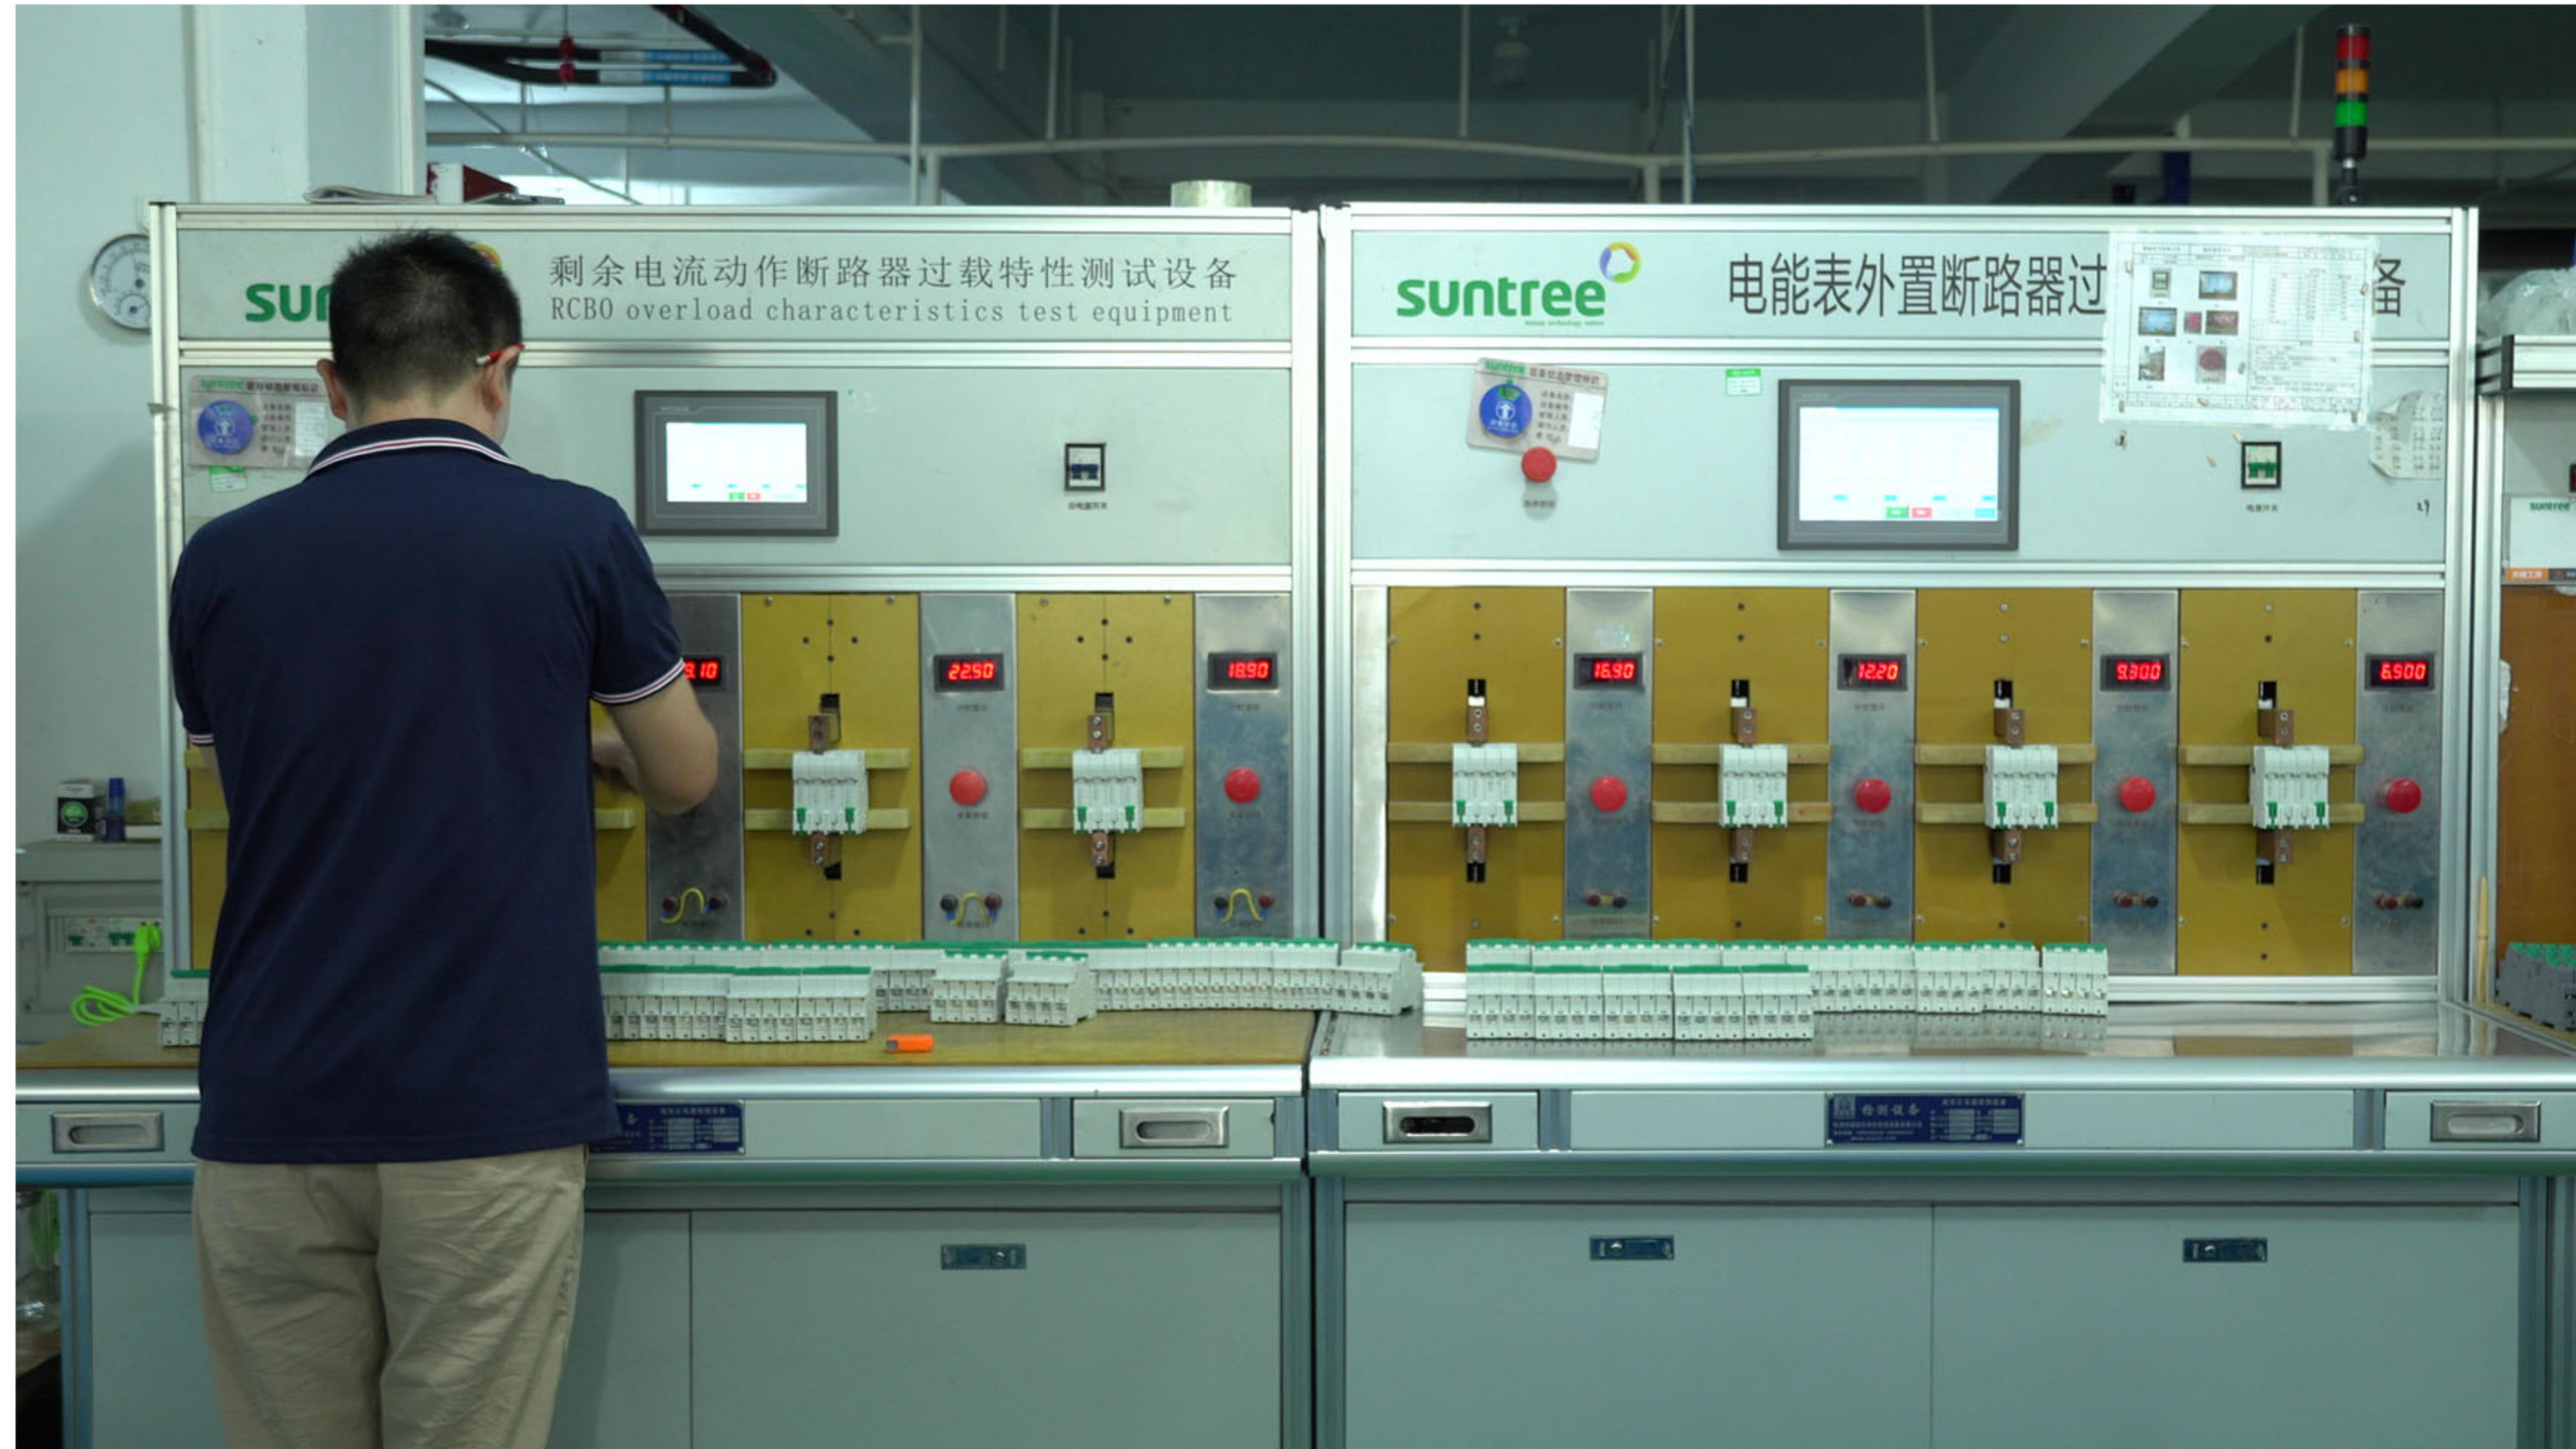

Prevent overload, Use twice the current of the product to test the tripping performance of the product under overload current, When the current overload is relatively large, it will trip in a short time

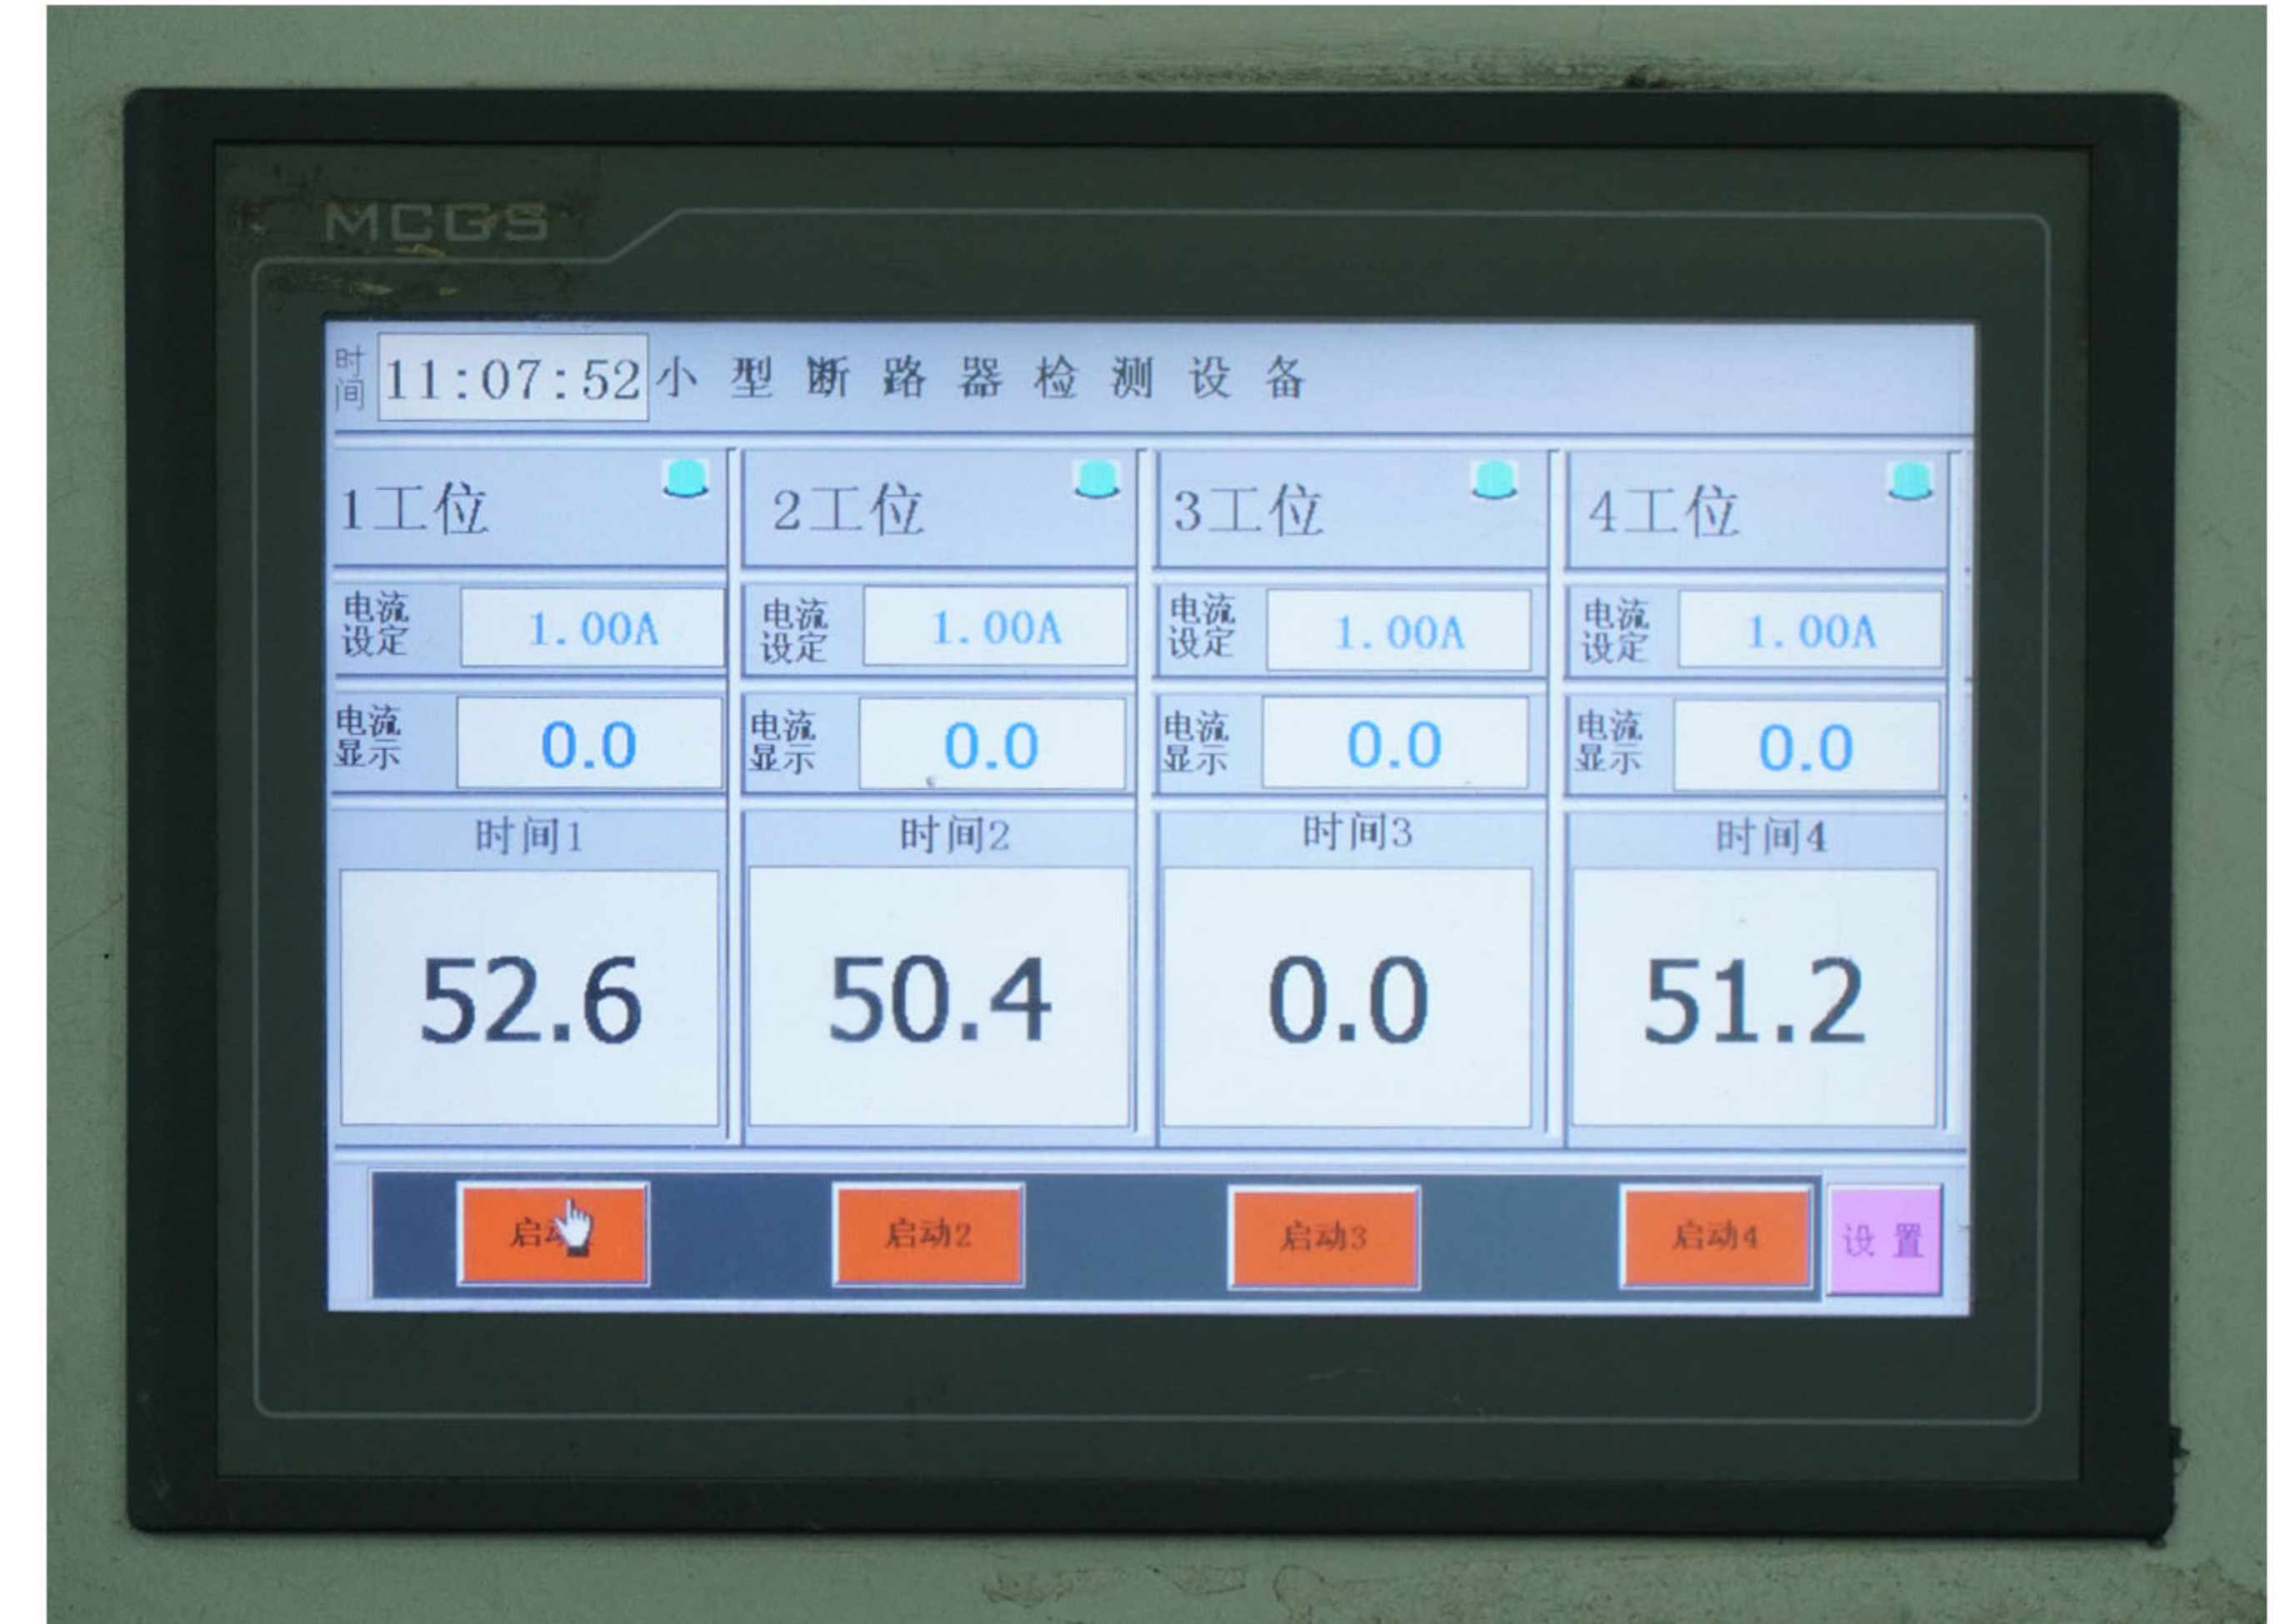

Use 5-7 times the product current to test the short-circuit tripping function, and it must be disconnected within 0.1 seconds after an instant short-circuit




The aging test is a process of simulating various factors involved in the actual use conditions of the product to carry out corresponding conditions and strengthening experiments on the aging of the product, and at the same time, according to the use requirements, reasonable predictions



Shockproof

Anti-fall

Prevent product damage in transit.

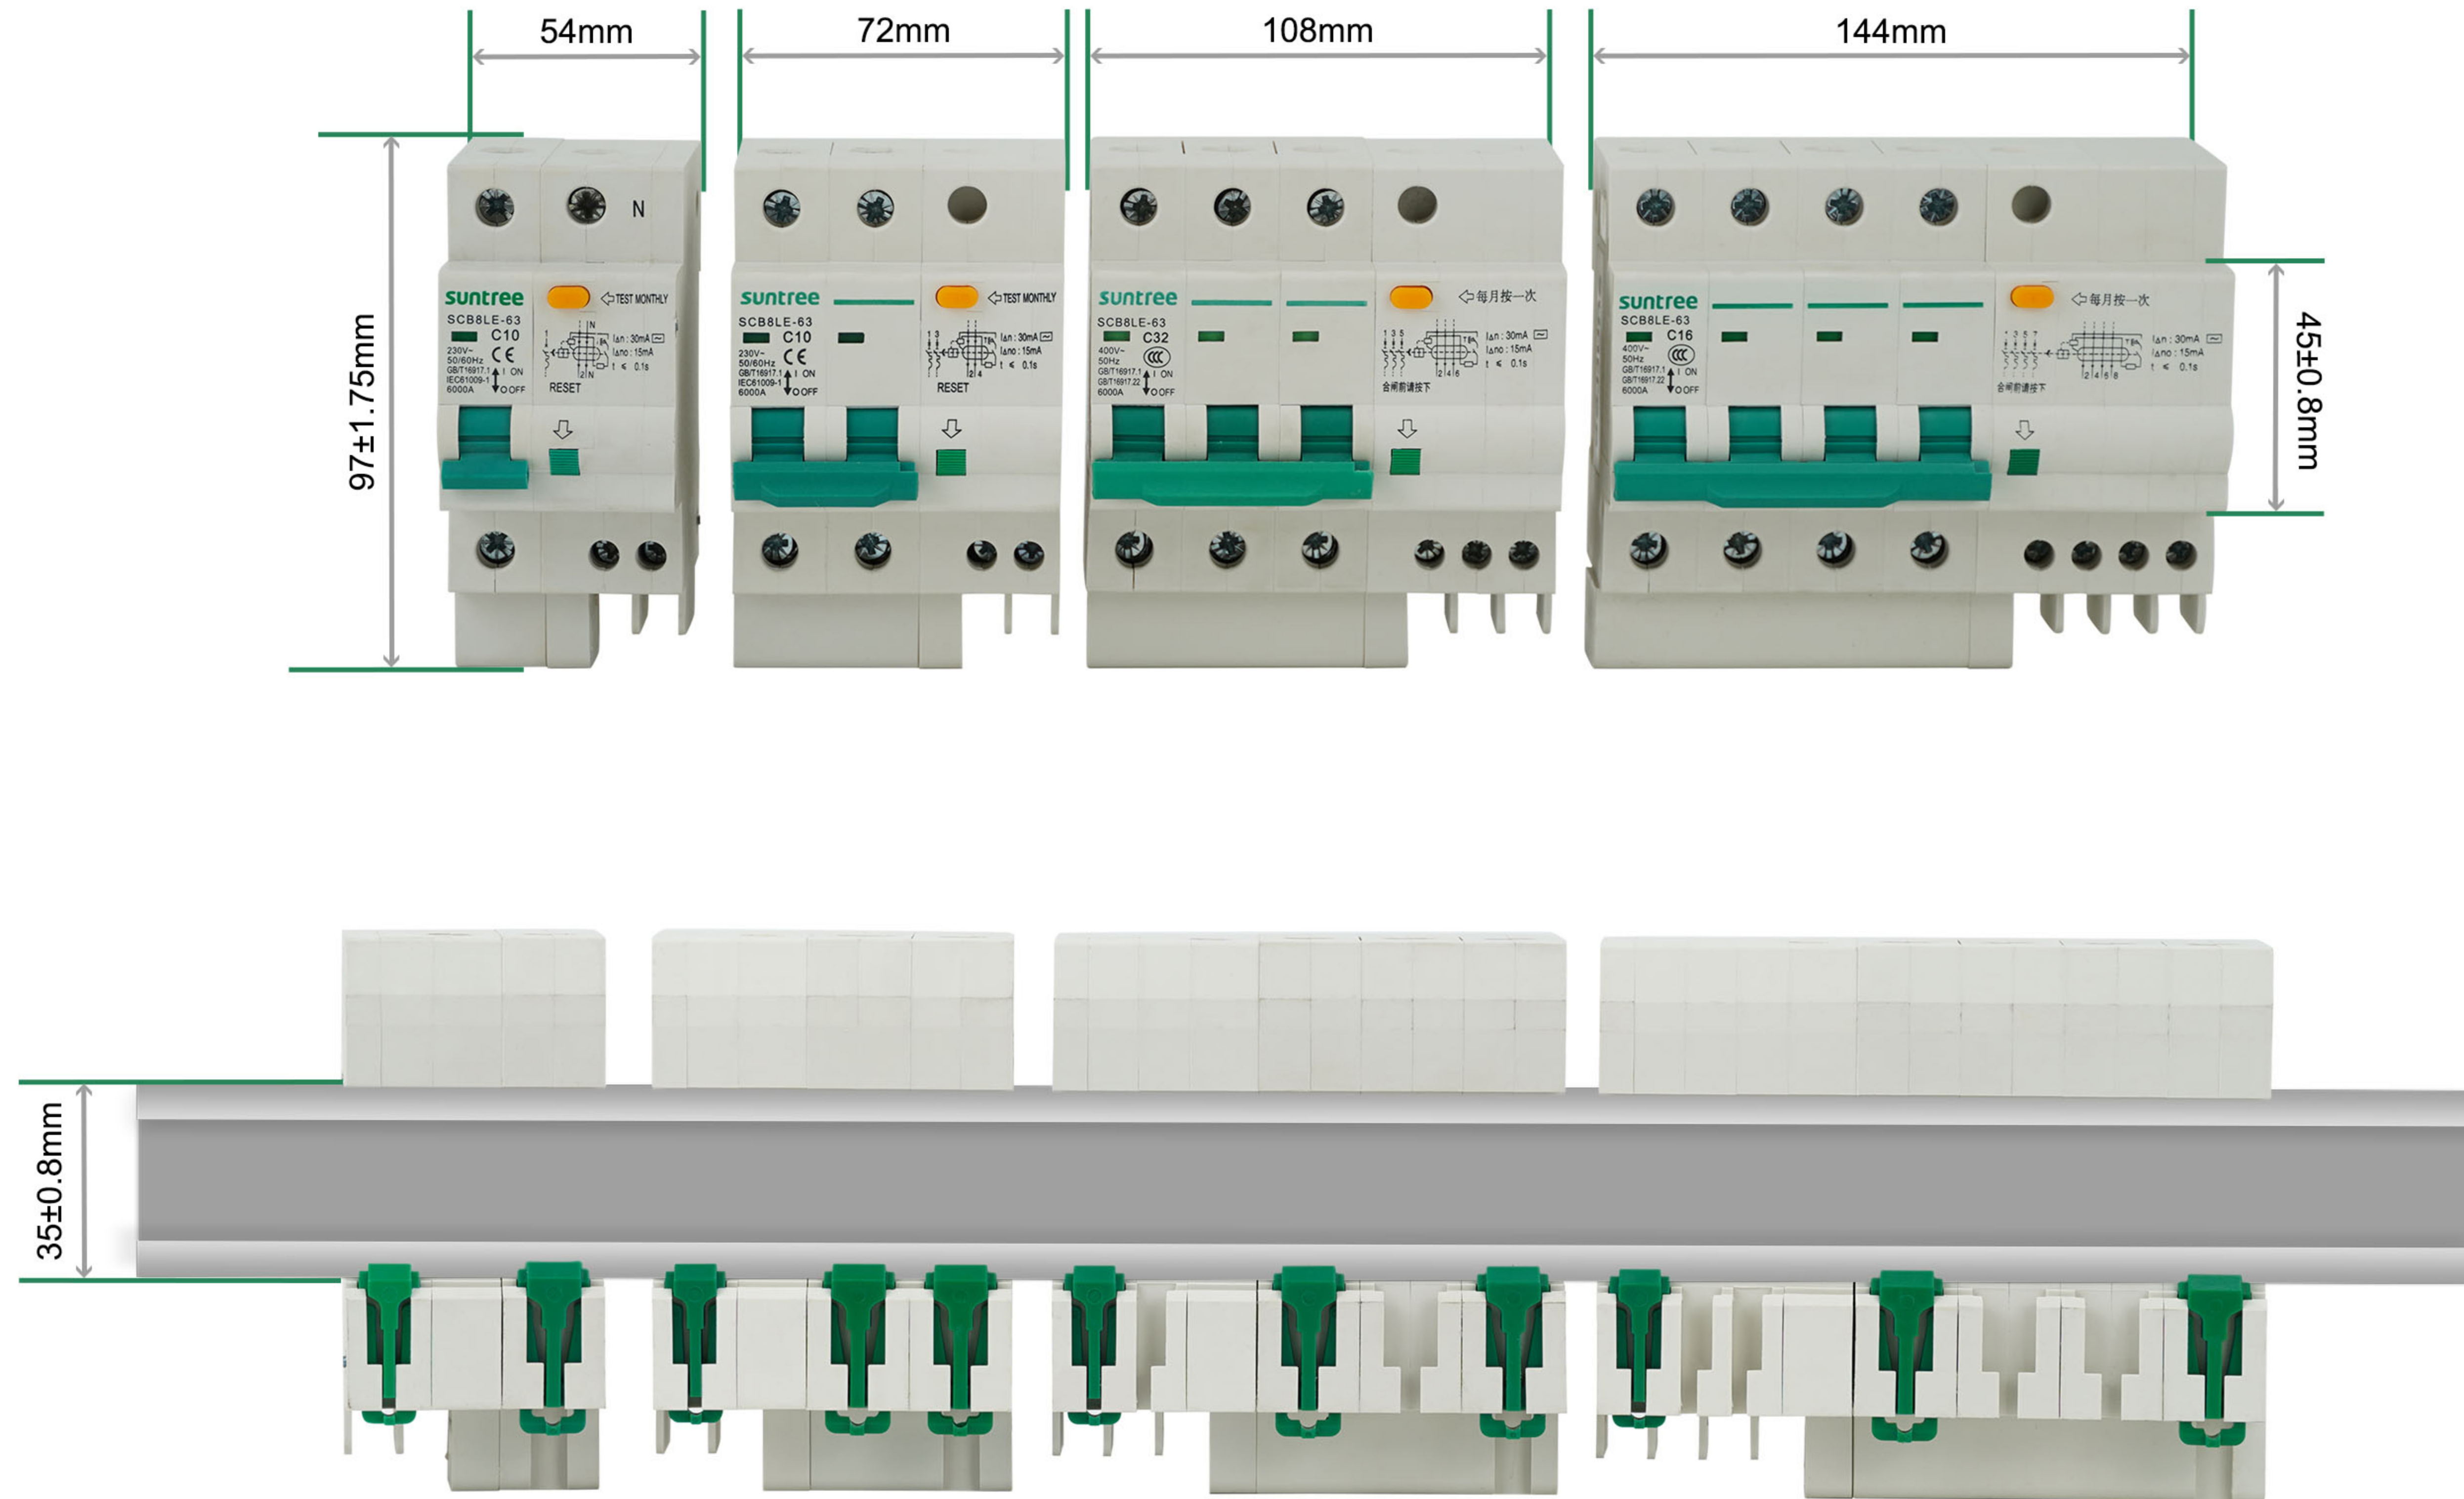



WEIGHT REFERENCE

Product model	SCB8LE-63			
Phase(Pole)	1P	2P	3P	4P
Electric current	63A			
N.W./pcs	0.2Kg	0.28Kg	0.42Kg	0.52Kg
G.W./box	0.88Kg	0.92Kg	0.92Kg	0.6Kg
QTY of inner box	80PCS	60PCS	40PCS	20PCS
Weight of one Carton	17.6Kg	18.4Kg	18.4Kg	12Kg


Different currents and different products have different weights.
This parameter is for reference only.



Inner box sticker



Outer box sticker

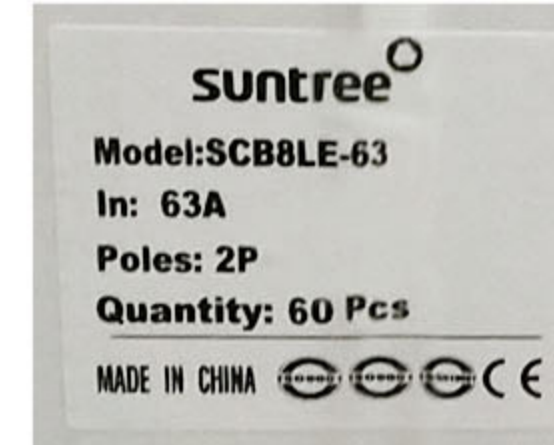

When the product is put into storage, the label on the box can conveniently count and identify the quantity, which is convenient to find and improving work efficiency.

suntree
human technology nature

// www.chinasuntree.com